

MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS		
4	4		CONTACT CARRIER MATERIAL	NYLON OR TPU	
	3 - 1	4 4	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
		P1 2 2 3 J1	CONTACT MATERIAL/PLATING	BRASS/GOLD	
1 - ((0 0 0)) 3		Ī ← • 	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
			RATED CURRENT [A]	4.0 A	
		4 7	RATED VOLTAGE [V]	250 V	
2		J2 J2	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	
				•	

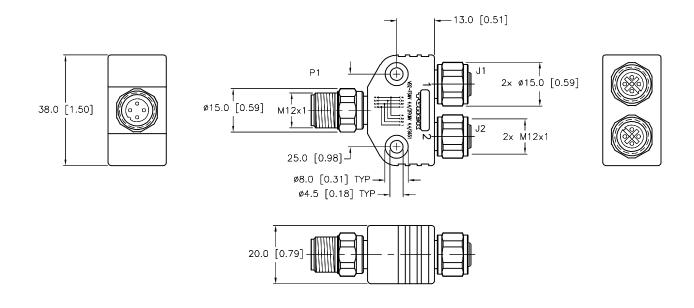

SOURCE DRAWING - FOR REFERENCE ONLY

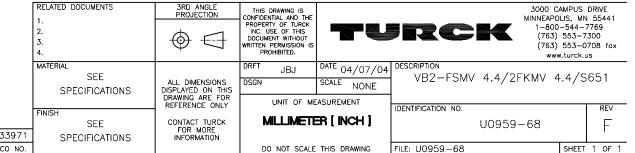

NOTES:

1. "/S651" DESIGNATES PARALLEL WIRED.

F	DRAWING PROCESSED AS PART OF ECO 33971	T OF ECO 33971 CBM 04/07/11 339			SEE SPECIFICATIONS	FOR MORE INFORMATION		U0959-68		F
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING	FILE: U0959-68	SHEET	1 OF 1