





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 	 	P1 1 ← 2 ← 3 ← 4 ← J1 1 < 2 < 3 < 4 <	CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	48 VAC/VDC
			TEMPERATURE RANGE	−40°C to +105°C (−40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

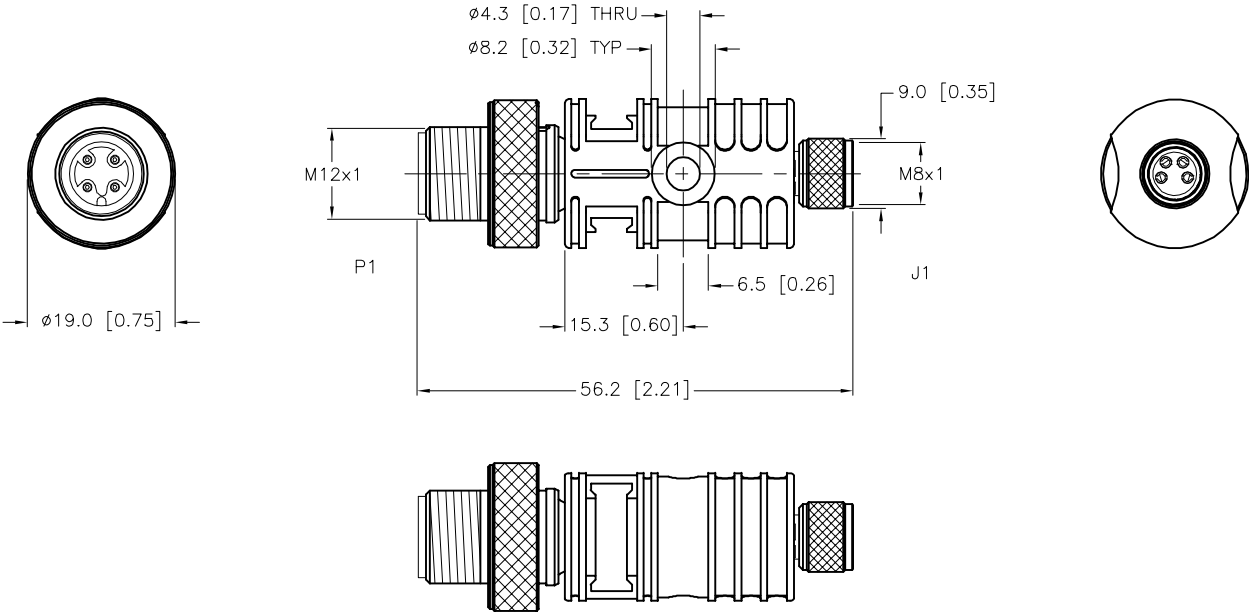

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S857" DESIGNATES MOUNTING HOLE.

NOTES: 1. "S857" DESIGNATES MOUNTING HOLE.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
					1.										
					2.										
					3.										
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 07/09/10		DESCRIPTION FSMR 4.4-SKM 4/S857			
SEE SPECIFICATIONS		APVD				SCALE 1=1.0									
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U0986-51				REV C	
DO NOT SCALE THIS DRAWING						FILE: U0986-51				SHEET 1 OF 1					
C	UPDATE RATED VOLTAGE				NF	10/11/17	62457								
REV	DESCRIPTION				BY	DATE	ECO NO.								