




MALE END VIEW

PANEL CUTOUT (TYPICAL)

SPECIFICATIONS



BASIC THRU

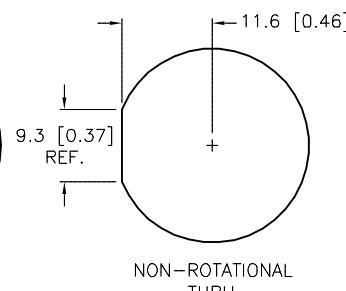

NON-ROTATIONAL THRU

CONTACT CARRIER MATERIAL/COLOR

NYLON OR TPU

CONTACT MATERIAL/PLATING

BRASS/GOLD

HOUSING/LOCKNUT MATERIAL/PLATING

BRASS/NICKEL

SEALING RING

NITRILE OR FLUOR RUBBER

RATED CURRENT [A]

8.0 A

RATED VOLTAGE [V]

300 V

TERMINATION METHOD

SOLDER LUG

MAXIMUM CONDUCTOR SIZE [AWG]

17 AWG

TEMPERATURE RANGE




-40°C to +105°C (-40°F to +221°F)

PROTECTION CLASS

MEETS IP65

MAXIMUM WALL THICKNESS

MAXIMUM IS 6.5mm [0.25"]

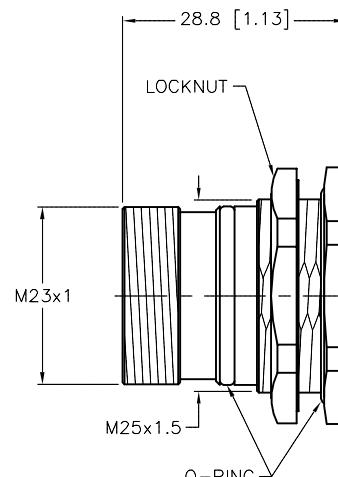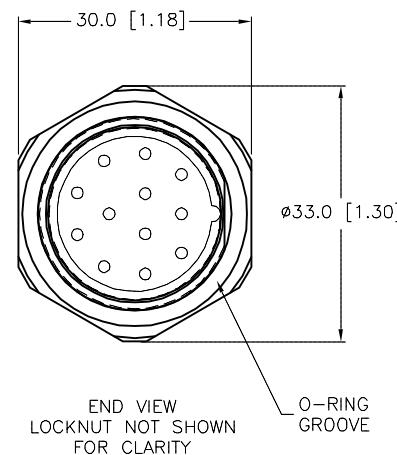

NOTE:


1. CONTACT HOLDER ASSEMBLED AND UV CURED INTO HOUSING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

DRFT

RDS

DATE

01/23/14

APVD

L.H.

SCALE

1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DESCRIPTION

CSFD 12-0

IDENTIFICATION NO.

U0986-81

REV

A

DO NOT SCALE THIS DRAWING

FILE: U0986-81

SHEET 1 OF 1

A DRAWING RELEASE

RDS

01/28/14

REV DESCRIPTION

BY

DATE

ECO NO.