




## MALE END VIEW



## FEMALE END VIEW



## PANEL CUT-OUT



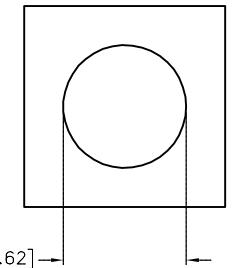


## SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	150 V
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
GASKET MATERIAL	NITRILE (BUNA N)
ISOLATOR MATERIAL	NYLON

## WIRING DIAGRAM

1 <--> 1  
2 <--> 2  
3 <--> 3  
4 <--> 4  
5 <--> 5  
6 <--> 6

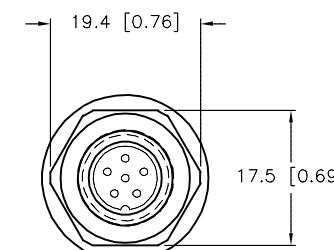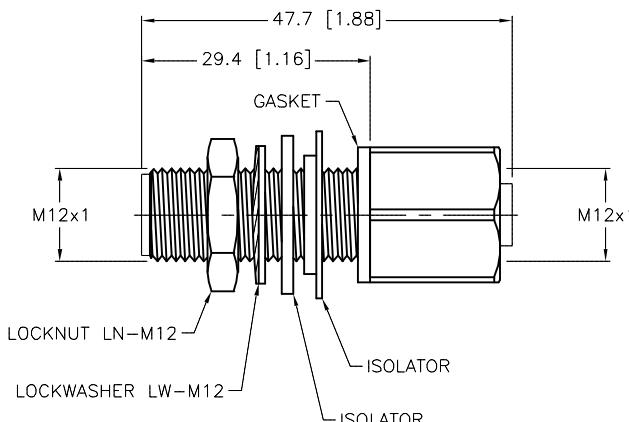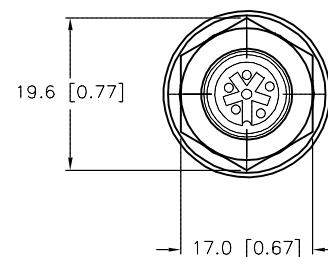

## NOTES:

1. CONNECTOR KEYWAY POSITIONS ARE REFERENCE ONLY. KEYWAYS MAY BE IN ANY POSITION.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT TR DATE 11/13/08		DESCRIPTION FK FS 4.6/M12	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0700 fax www.turck.us	
			APVD	SCALE 1=1.0			
			UNIT OF MEASUREMENT				
			CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [ INCH ]	IDENTIFICATION NO. U1135-2	REV E	
SEE SPECIFICATIONS		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: U1135-2	
E ADD KEYWAY NOTE		NF 06/15/15	49971	SHEET 1 OF 1			
REV	DESCRIPTION	BY	DATE	ECO NO.			