
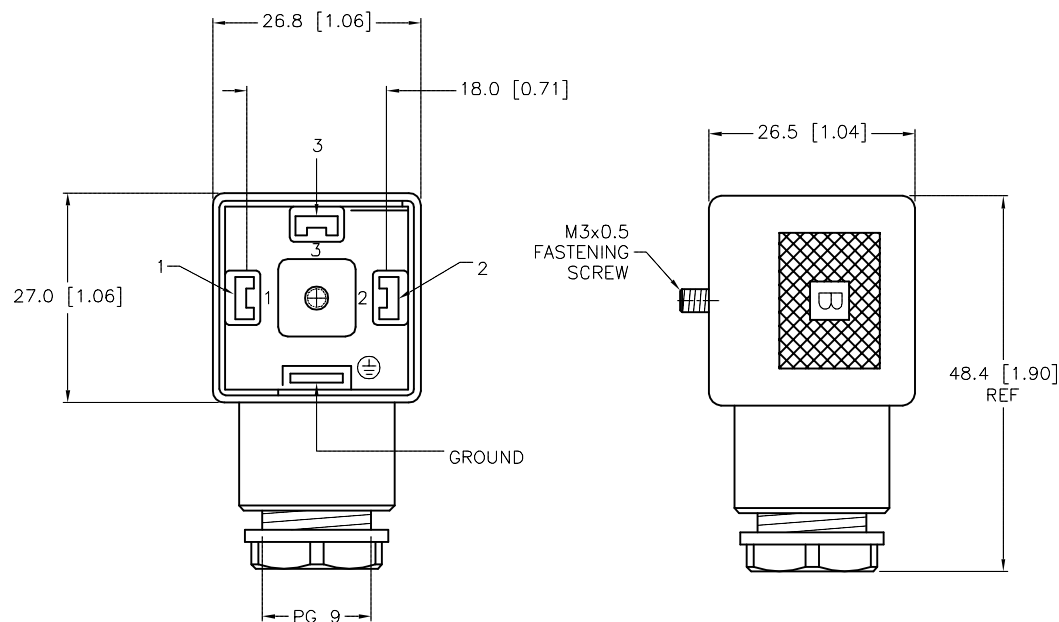


VALVE END VIEW





SPECIFICATIONS

HOUSING/COLOR	NYLON/BLACK
HOUSING/COLOR	NYLON/BLACK
RATED CURRENT	10 A
RATED VOLTAGE	250 V
GASKET	NITRILE
CONTACTS	NICKEL-PLATED BRASS
TERMINAL	SCREW TERMINALS, CONDUCTORS TO 14 AWG
CABLE GLAND	PG 9
TEMPERATURE	-25°C TO +90°C (-13°F TO +194°F)
PROTECTION CLASS	MEETS NEMA 4,6P, AND IEC IP 65

NOTES:

1. THE CONNECTOR FACE OF THIS CONNECTOR CAN BE RECEIVED IN 90 DEGREE INCREMENTS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	IK	DATE	12/22/98	DESCRIPTION VAS 3-AW	
FINISH SEE SPECIFICATIONS		APVD		SCALE	1=1.0		
		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U1223		REV E
		DO NOT SCALE THIS DRAWING			FILE: U1223		SHEET 1 OF 1