

SPECIFICATIONS						
HOUSING/COLOR	NYLON/BLACK					
HOUSING/COLOR	NYLON/BLACK					
RATED CURRENT	10 A					
RATED VOLTAGE	250 V					
GASKET	NITRILE					
CONTACTS	BRASS/NICKEL					
TERMINAL	SCREW TERMINALS, CONDUCTORS TO 14 AWG					
CABLE GLAND	PG 9					
TEMPERATURE	-25°C TO +90°C (-13°F TO +194°F)					
PROTECTION CLASS	MEETS NEMA 4,6P, AND IEC IP 65					

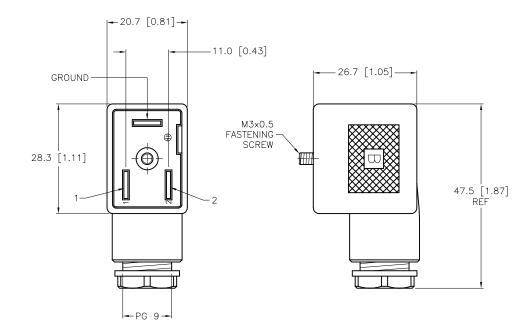



<u>GASKET</u>

					RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automatik	MINNEAF 1-80 (763 (763 (763	CAMPUS DRIVE OLIS, MN 55441 0-544-7769) 553-7300) 553-0708 fax urck.com
					MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT IK APVD UNIT OF ME	DATE 12/22/98 SCALE 1=1.0		VIS 2-AW	
F	DRAWING PROCESSED AS PART OF ECO 38282	КМҮ	03/07/12	2 38282	FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]	IDENTIFICATION NO.	U1223-1	REV
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: U1223-1		SHEET 1 OF 1