



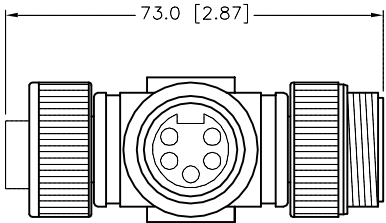
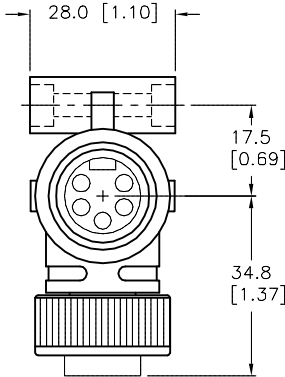
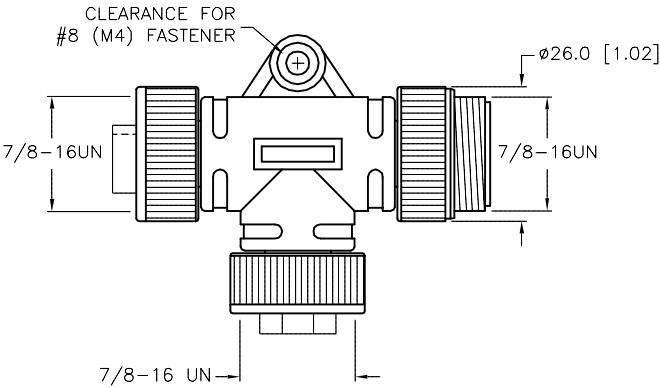
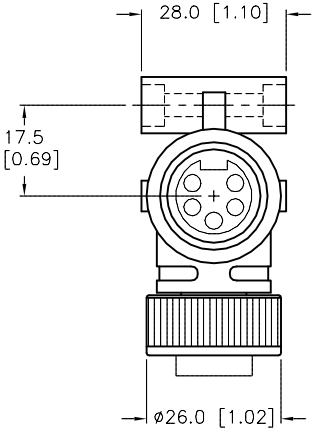




FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RATING	-40°C TO +80°C (-42°F TO +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1.											
					2.											
					3.											
					4.											
					MATERIAL				DRFT		RDS		DATE 01/28/08		DESCRIPTION RSV-2RKV 50	
									APVD				SCALE 1 = 1.5			
					FINISH				UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV	
													U2-02795		B	
B		DRAWING PROCESSED AS PART OF ECO 33971			CBM		04/07/11		33971							
REV		DESCRIPTION			BY		DATE		ECO NO.				FILE: U2-02795		SHEET 1 OF 1	