



MALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	24 A
RATED VOLTAGE [V]	600 V
CABLE OUTSIDE DIAMETER	10–14mm [0.39–0.55"]
CONDUCTOR SIZE [AWG]	12–14 AWG
TEMPERATURE RANGE	–40°C to +90°C (–40°F to +194°F)
PROTECTION CLASS	IEC IP67

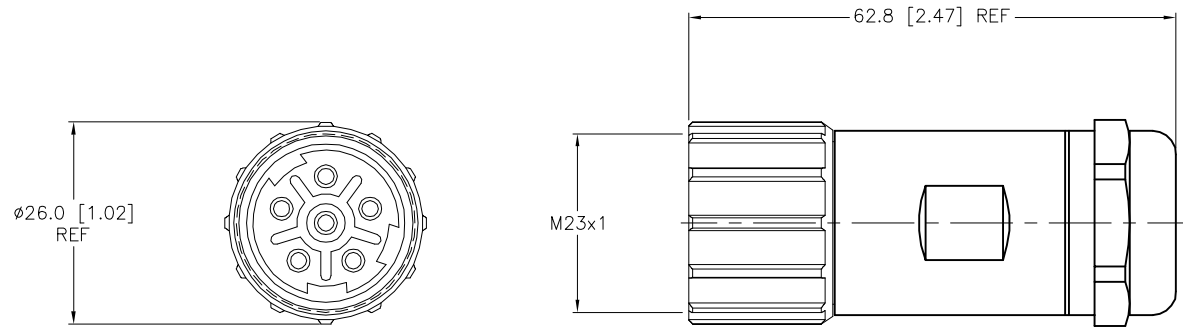



**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING – FOR REFERENCE ONLY

NOTES:

1. THIS IS A FIELD WIREABLE CONNECTOR. ASSEMBLY REQUIRED BY END USER.

D	ADD NOTE	TR	12/06/19	75472
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> <div>TURCK</div>	
1.					
2.			DRFT RWC	DATE 12/08/05	DESCRIPTION CS 62-0
3.				SCALE 1=1.0	
4.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-04270
MATERIAL SEE SPECIFICATIONS			APVD		
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		REV D	
			DO NOT SCALE THIS DRAWING		FILE: U2-04270
					SHEET 1 OF 1