




## MALE END VIEW

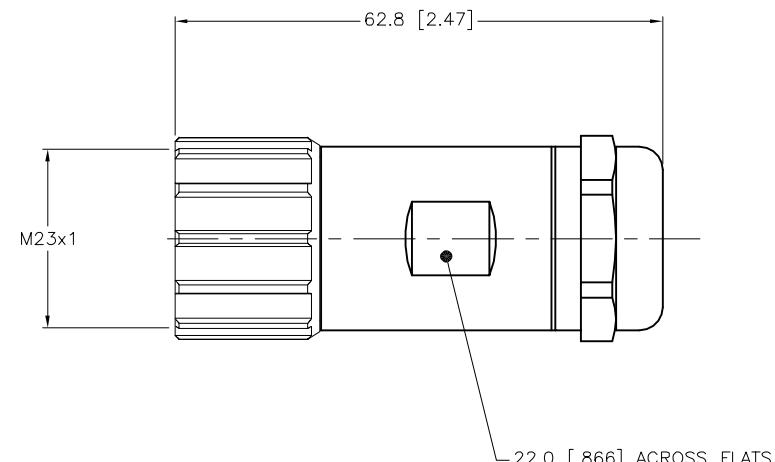

## SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	24 A (1-4), 8 A (A-D)
RATED VOLTAGE [V]	600 V
CONDUCTOR SIZE [AWG]	4x12 AWG, 4x18 AWG
PROTECTION CLASS	IEC IP67

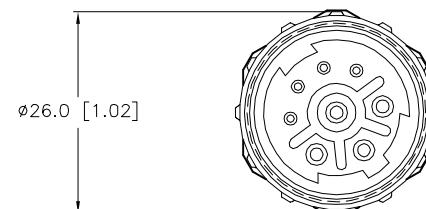

**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

1. THIS IS A FIELD WIREABLE CONNECTOR. ASSEMBLY REQUIRED BY END USER.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1. 2. 3. 4.			DRFT	RDS	DATE 04/13/12
			APVD	A.A.	SCALE 1=1.0
			UNIT OF MEASUREMENT		DESCRIPTION
			MILLIMETER [ INCH ]		CS 82-0
			CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.	REV
				U2-04272	B
			DO NOT SCALE THIS DRAWING	FILE: U2-04272	SHEET 1 OF 1

B | ADD NOTE

TR | 12/06/19 | 75472

REV | DESCRIPTION

BY | DATE | ECO NO.