






J1 CONNECTOR	J2 CONNECTOR	TERMINAL BLOCK PLUGS		SPECIFICATIONS	
				HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
				RECEPTACLE HOUSING/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING CURRENT [A]	8.0 A PER CONDUCTOR
				OPERATING VOLTAGE [V]	250 V
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)



COVER SCREWS INCLUDED

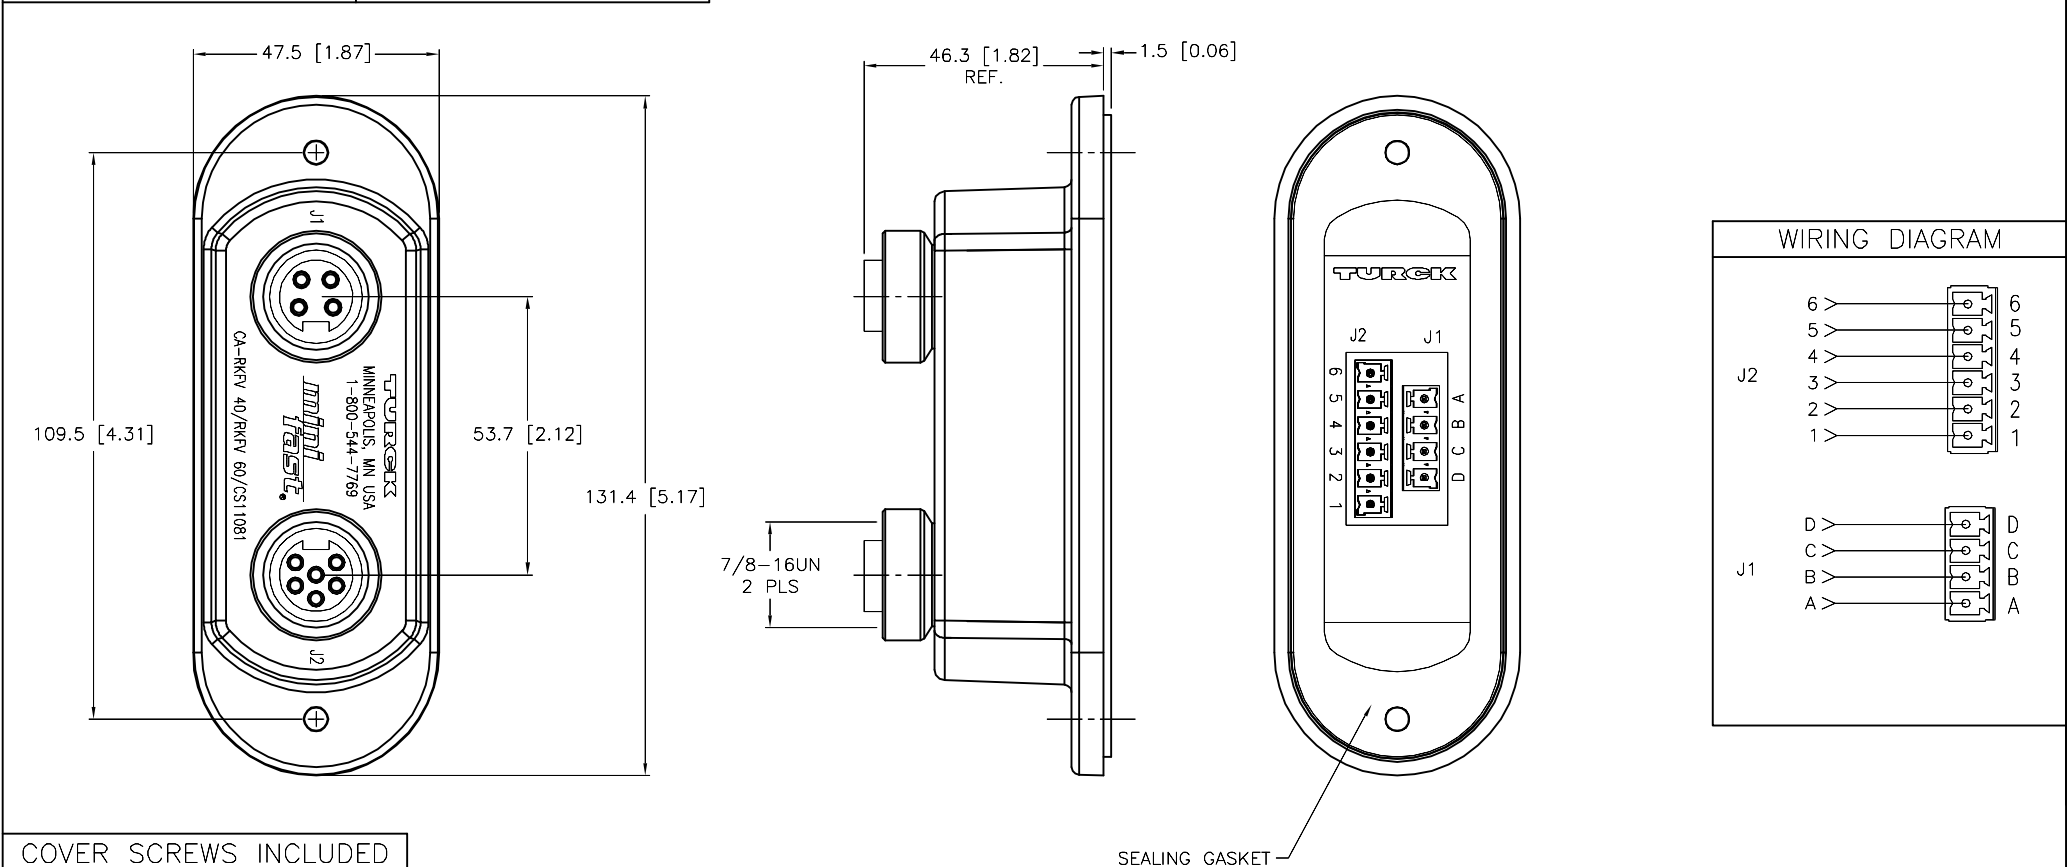

FORM 8 CONDUIT BODIES:
10-24 SCREWS




MARK 9 CONDUIT BODIES:
8-32 SCREWS

NOTES:

1. "/CS11081" DESIGNATES LABEL ON CONDUIT ADAPTERS WITH LETTER DESIGNATION RATHER THAN NUMBER DESIGNATIONS.

D	ADD THICKER GASKET	RDS	09/12/13	42993
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	05/09/05	DESCRIPTION	
SEE SPECIFICATIONS		APVD		SCALE	1 = 1.5	CA-RKFV 40/RKFV 60/CS11081	
		UNIT OF MEASUREMENT			IDENTIFICATION NO.		
		MILLIMETER [INCH]			U2-05155		
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			REV		
SEE SPECIFICATIONS					D		
		FILE: U2-05155			SHEET 1 OF 1		

SOURCE DRAWING - FOR REFERENCE ONLY