

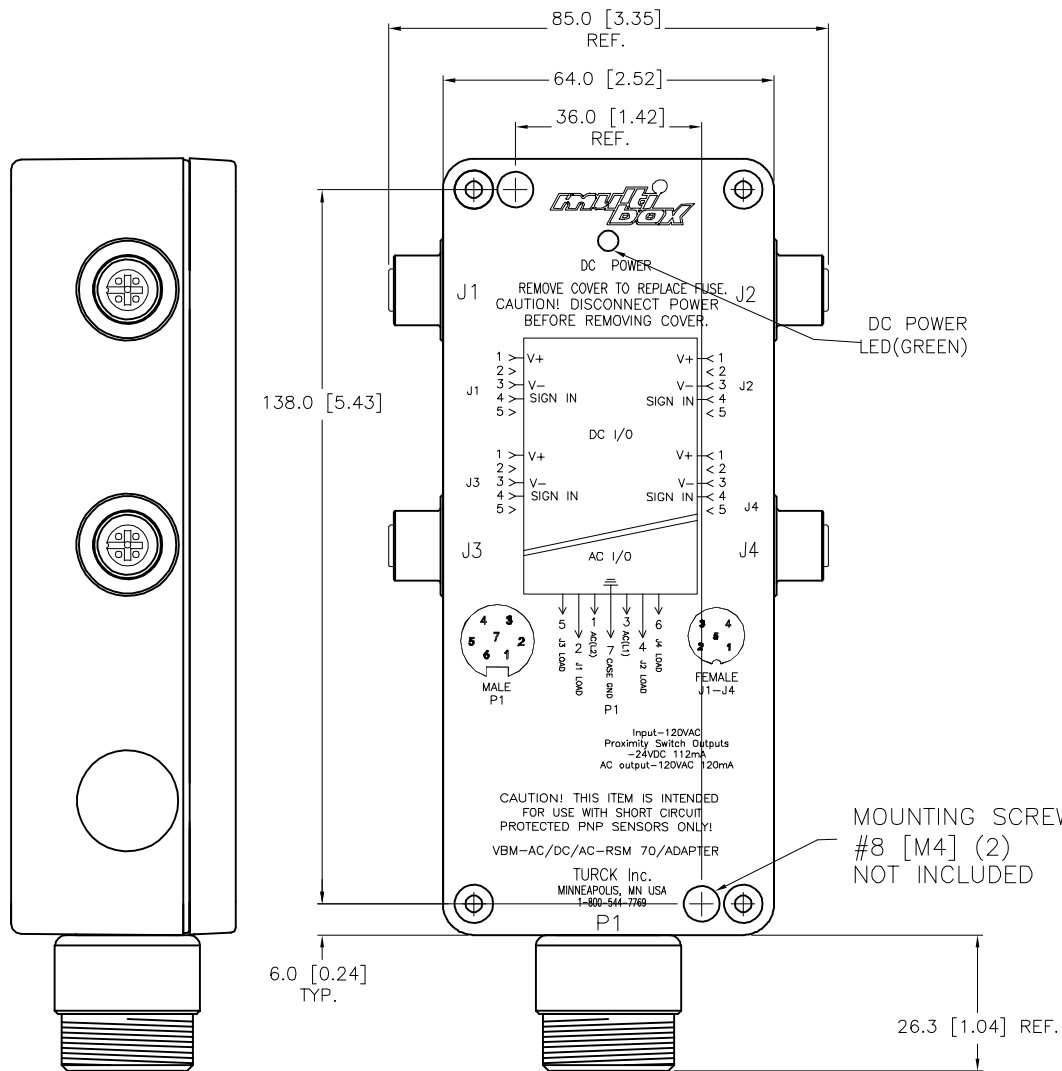


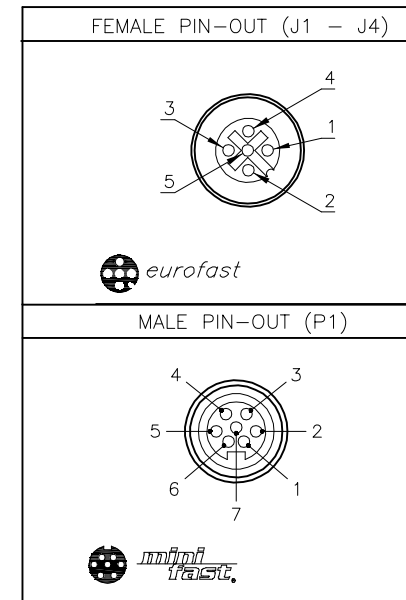

SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING	BRASS/NICKEL PLATED
CONTACT CARRIERS/COLOR	NYLON/BK (J1-J4), NYLON or PBT/WH (P1)
CONTACTS	GOLD-PLATED BRASS
INPUT VOLTAGE	85-132 VAC
OUTPUT VOLTAGE	24 VDC
OUTPUT CURRENT	112mA PER CONNECTOR
LED FUNCTION	DC CURRENT PRESENT
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 70°C (-22°F to 158°F)

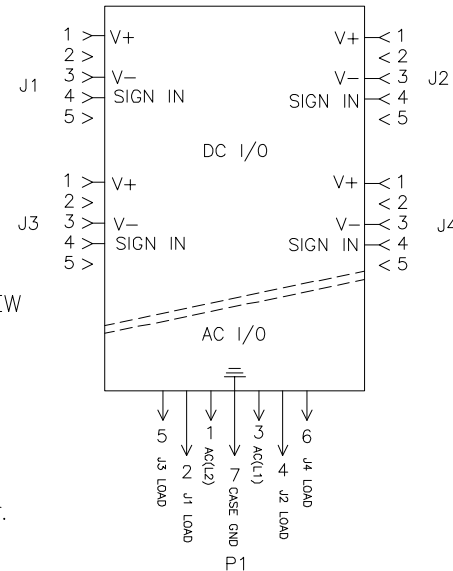

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.									
MATERIAL		DRFT PJ		DATE 09/27/05		DESCRIPTION VBM-AC/DC/AC-RSM 70/ADAPTER BOX			
SEE SPECIFICATIONS		APVD		SCALE 1=1.5					
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-05331		REV E	
SEE SPECIFICATIONS									
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-05331		SHEET 1 OF 1	

CLOSURE CAPS
(2 INCLUDED)

E	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.