




FEMALE END VIEW

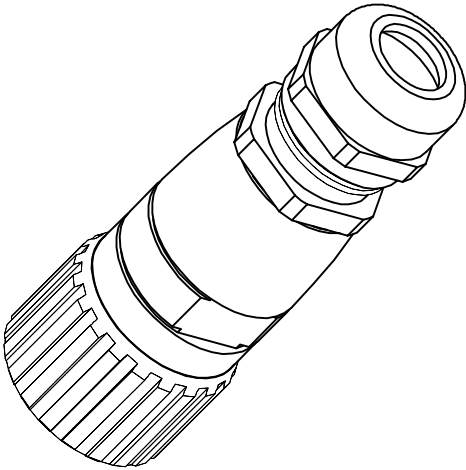

 *M23 connector*


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	20.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	6/14 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	−40°C to 125°C (−40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	7mm (.726") TO 10mm (.394")

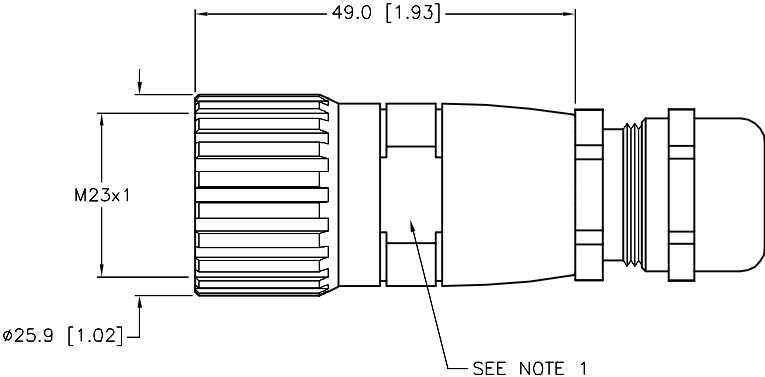

NOTES:
1. WRENCH FLAT: 20mm.

SOURCE DRAWING - FOR REFERENCE ONLY

A	DRAWING RELEASE	DD	11/08/05	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC
				DATE	10/25/05
				APVD	SCALE 1=1.0
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION CK 64-0	
		DO NOT SCALE THIS DRAWING	IDENTIFICATION NO. U2-05693		REV A
		FILE: U2-05693		SHEET 1 OF 1	