
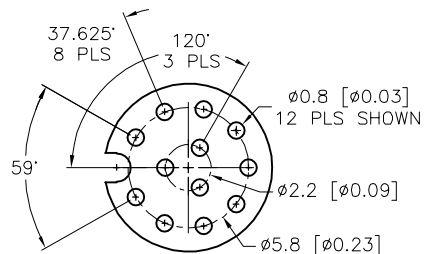


MALE END VIEW

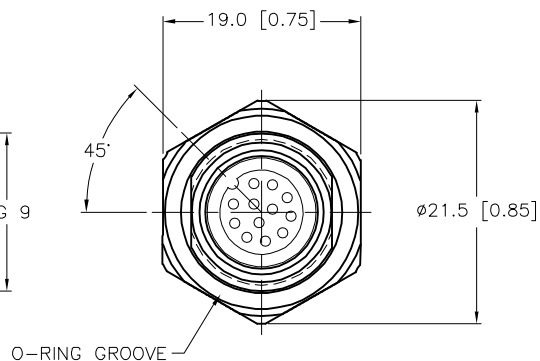
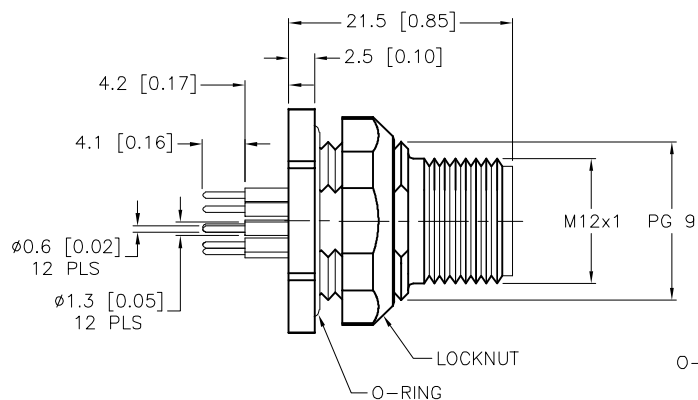
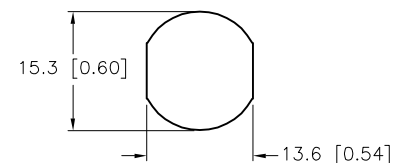


BOARD LAYOUT (2:1)

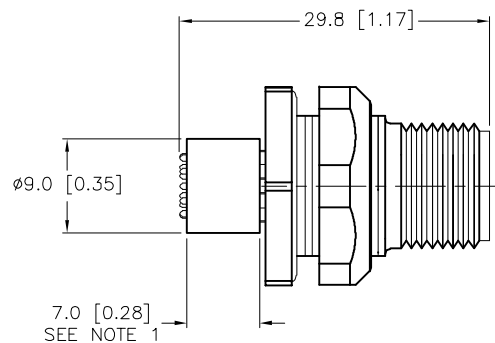


SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	30 V
CONDUCTORS	PCB PINS
TEMPERATURE RATING	-30°C to +105°C (-22°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

END VIEW
LOCKNUT NOT SHOWN


MOUNTING HOLE



NOTES:

1. PIN SUPPORT IS FOR SHIPPING ONLY.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
								
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	08/11/05	DESCRIPTION FSFDK 12-PCB		
SEE SPECIFICATIONS		APVD		SCALE	1=.75			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U2-05778		REV F
SEE SPECIFICATIONS								
		FILE: U2-05778			SHEET 1 OF 1			

F	ADD ANGLE DIMENSION	NF	04/02/24	79994
REV	DESCRIPTION	BY	DATE	ECO NO.