


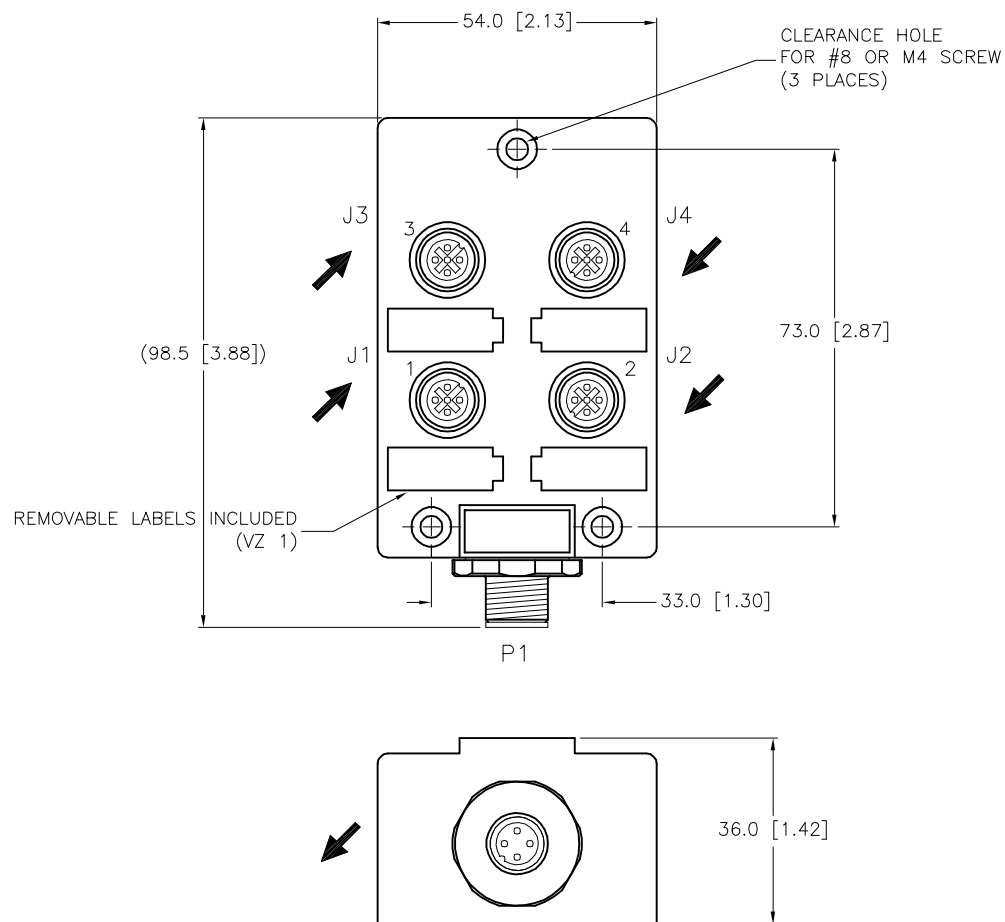

CLOSURE CAPS
(INCLUDED)

↑ = INDICATES KEY DIRECTION

NOTES:

1. "/S1106" DESIGNATES PINS 1 & 2 SERIES WIRED AND PINS 3 & 4 SERIES WIRED.

SPECIFICATIONS

MATERIAL


HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT CARRIER MATERIAL	NYLON OR TPU
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING RING MATERIAL	VITON O-RING
CONNECTOR HOUSING MAT'L/PLATING	BRASS/NICKEL

ELECTRICAL DATA


MAXIMUM VOLTAGE	48 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 4 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C

MECHANICAL DATA

PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +80°C (-40°F to 176°F)

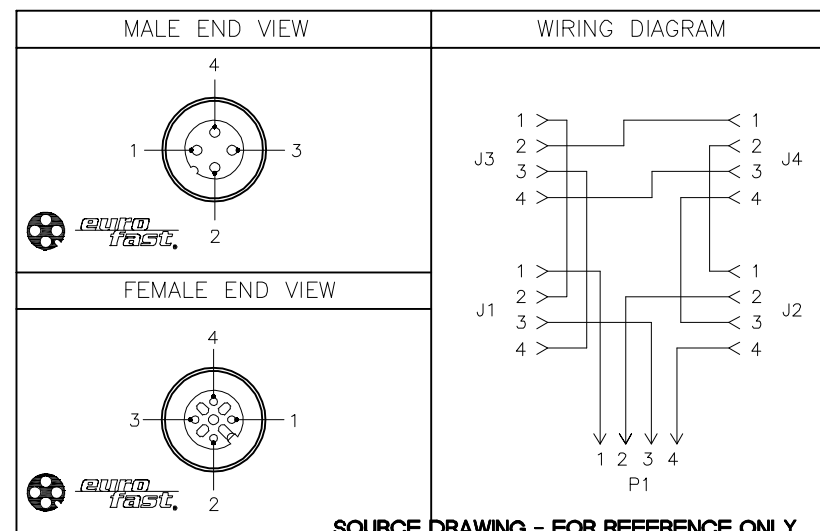

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. – 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	PJ	DATE	01/20/06	DESCRIPTION VB 40-H1141/S1106	
APVD			SCALE	1=2			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U2-05926	
		DO NOT SCALE THIS DRAWING				FILE: U2-05926	SHEET 1 OF 1

C	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO. NO.