


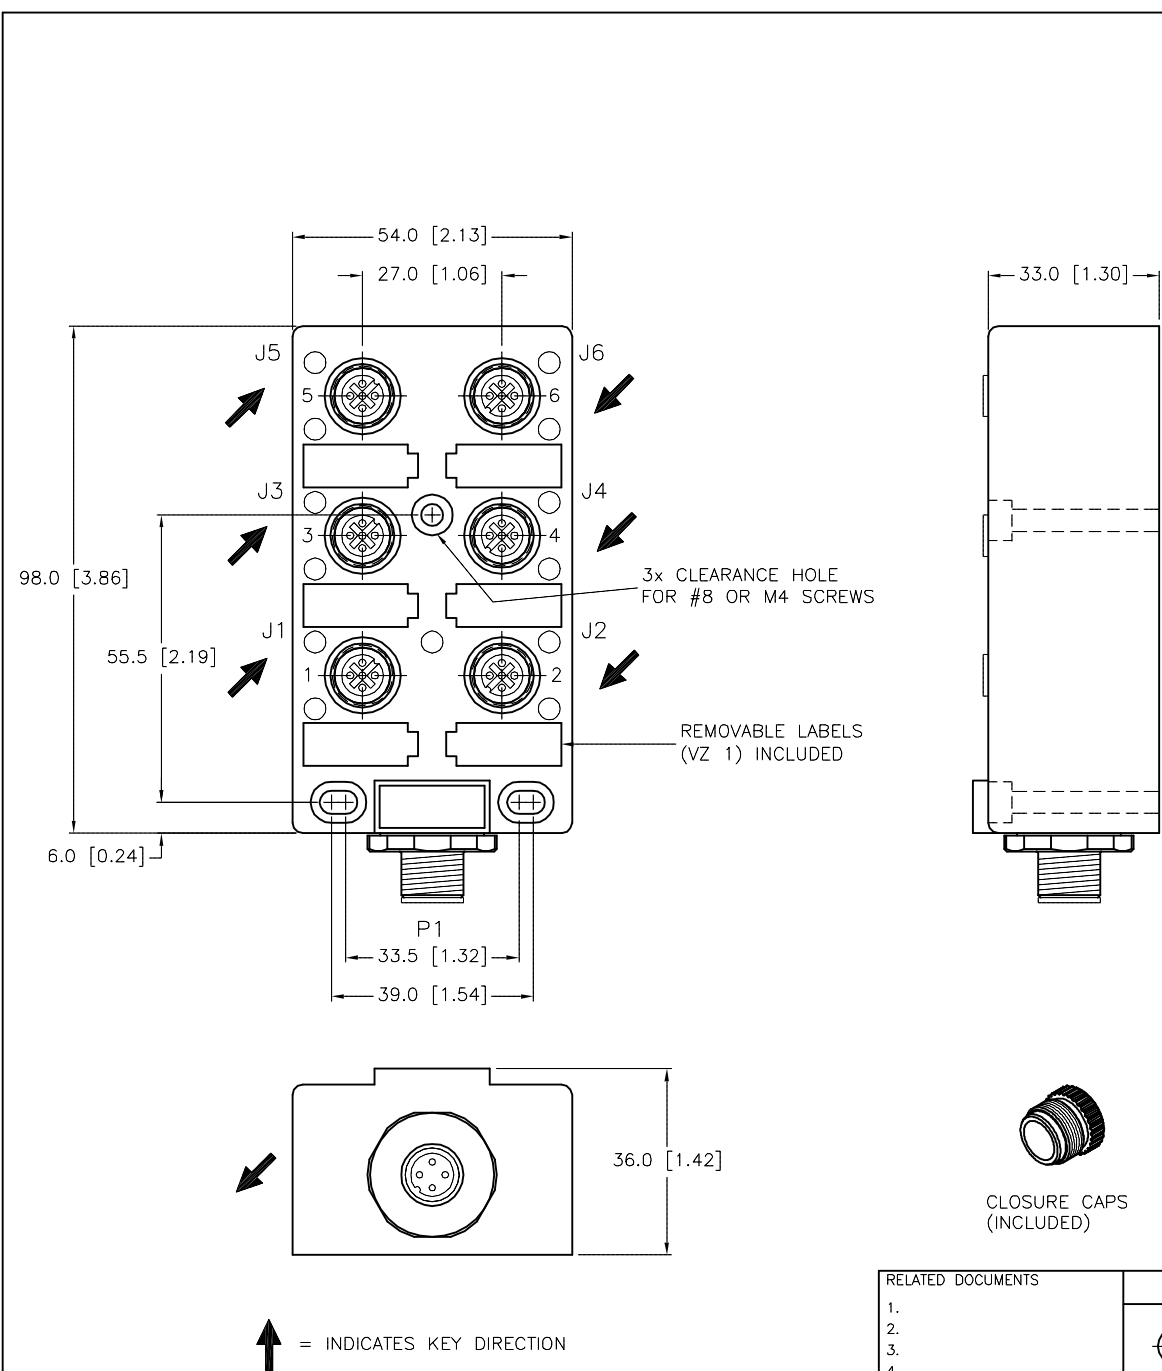


NOTES:


1. "/S1106" DESIGNATES PINS 1 & 2 SERIES WIRED AND PINS 3 & 4 SERIES WIRED.

C	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.

SPECIFICATIONS	
MATERIAL	
HOUSING/COLOR	NYLON/YELLOW
CONTACT CARRIERS	NYLON OR TPU
RECEPTACLE HOUSINGS	BRASS/NICKEL
CONTACTS	BRASS/GOLD
SEALING RING	VITON O-RING
CONNECTOR HOUSING	BRASS/NICKEL
ELECTRICAL DATA	
MAXIMUM VOLTAGE	48 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 4 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to 221°F)

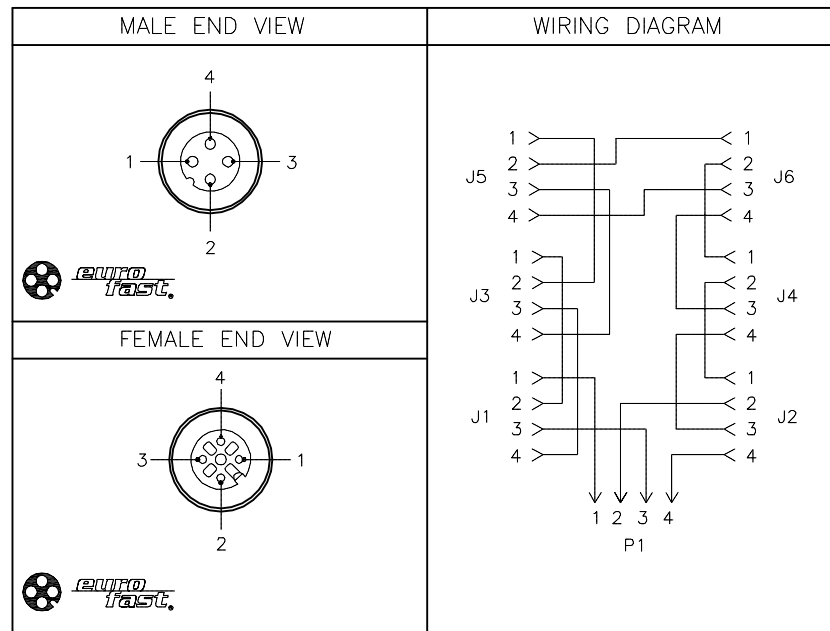

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	03/01/06		DESCRIPTION	VB 60-H1141/S1106
SEE SPECIFICATIONS		APVD		SCALE	1=1.5			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT				IDENTIFICATION NO.	REV
SEE SPECIFICATIONS	MILLIMETER [INCH]							
		DO NOT SCALE THIS DRAWING				FILE: U2-05927	SHEET 1 OF 1	