


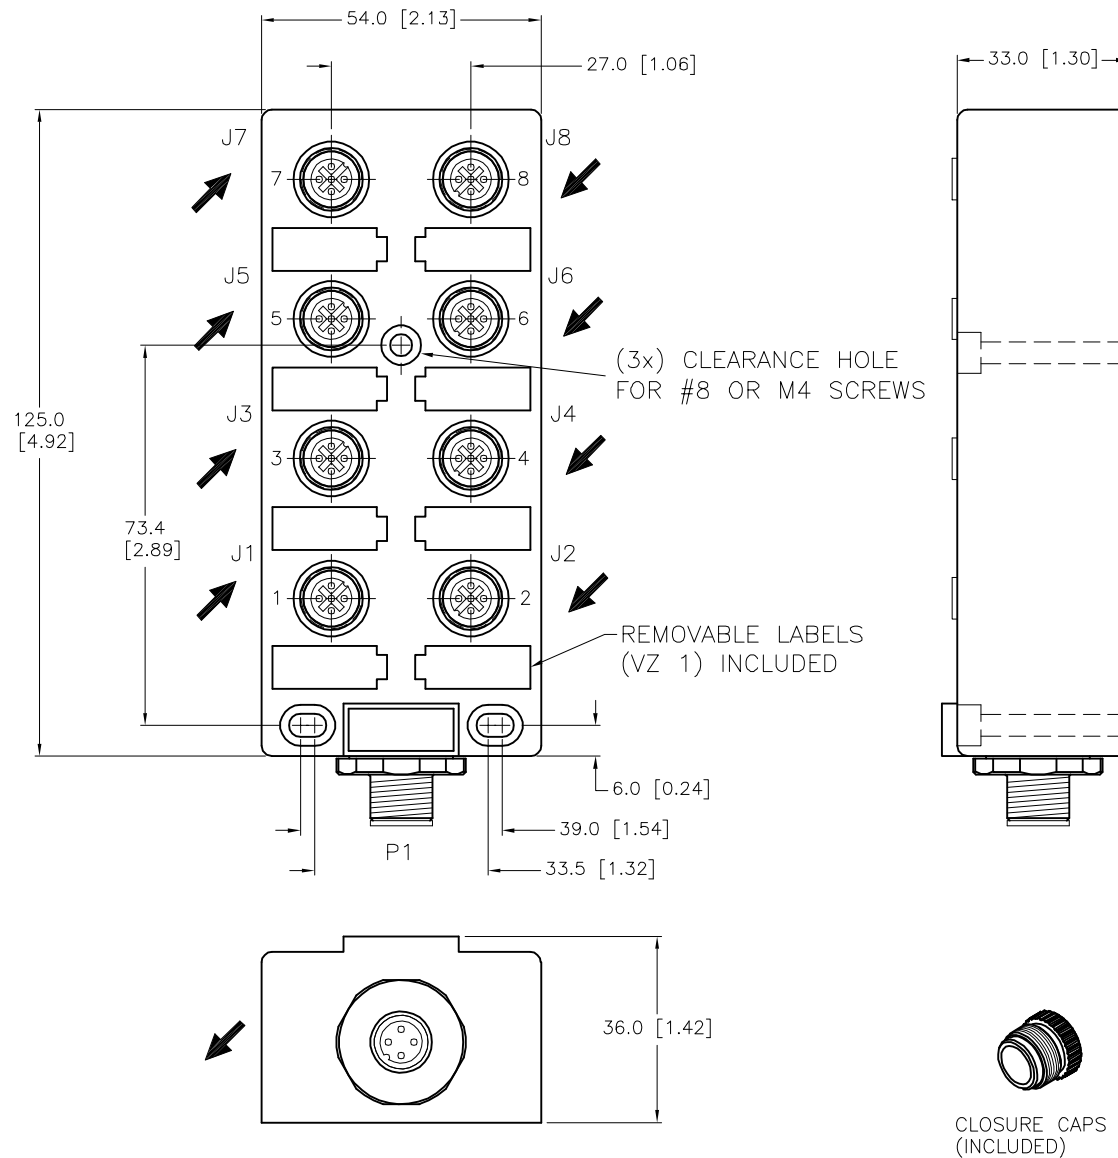


↑ = INDICATES KEY DIRECTION

NOTES:

1. "/S1106" DESIGNATES PINS 1 & 2 SERIES WIRED AND PINS 3 & 4 SERIES WIRED.

SPECIFICATIONS

MATERIAL	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT CARRIER MATERIAL	NYLON OR TPU
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING RING MATERIAL	VITON O-RING
CONNECTOR HOUSING MAT'L/PLATING	BRASS/NICKEL
ELECTRICAL DATA	
MAXIMUM VOLTAGE	48 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 4 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to 221°F)

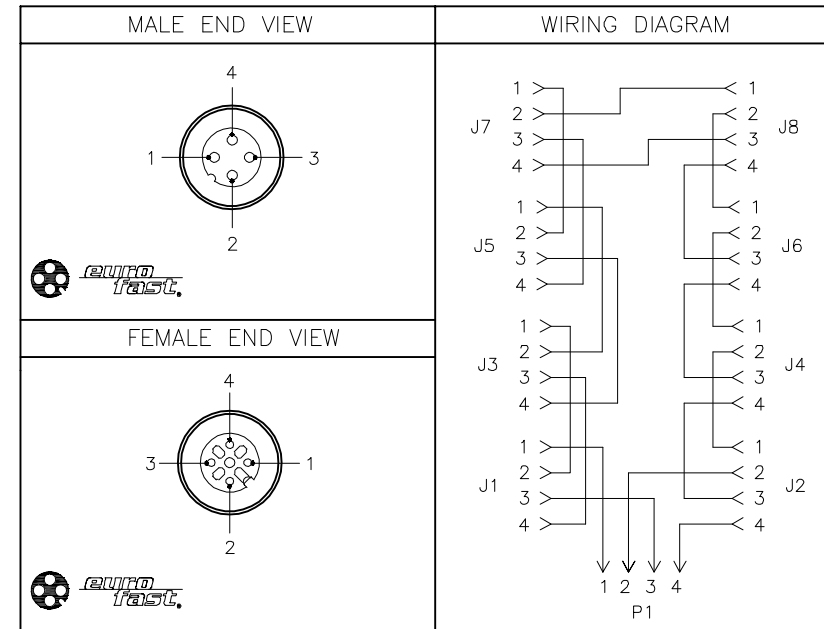

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. - 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT PJ	DATE 10/04/05	TURCK	
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	APVD	SCALE 1=2		
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VB 80-H1141/S1106	
		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-05928	REV C
				FILE: U2-05928	SHEET 1 OF 1

C	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.