


MALE END VIEW



 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PBT
CONTACT MATERIAL/PLATING	BRASS/NICKEL
HOUSING MATERIAL	NYLON
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
WIRE TERMINATION	SOLDER CUP
MAXIMUM WIRE SIZE	24 AWG
TEMPERATURE RANGE	-30°C to +85°C [-30°F to 185°F]
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE

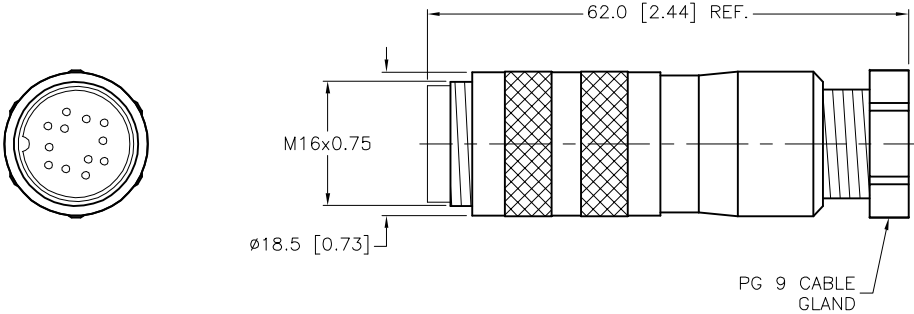


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.  
2.  
3.  
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC

DATE 07/01/08

DSGN

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

TURCK

DESCRIPTION

BSS 12-0

IDENTIFICATION NO.

U2-06564

REV

A

A

DRAWING RELEASE

RWC

07/03/08

REV

DESCRIPTION

BY

DATE

ECO NO.

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION