



FEMALE END VIEW



 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL	NYLON
COUPLING NUT MATERIAL/PLATING	BRASS/BLACK CHROMIUM
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-30°C to +95°C [-22°F to +203°F]
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE
CONNECTION TYPE	SOLDER CUP
MAX. CONDUCTOR SIZE	24 AWG

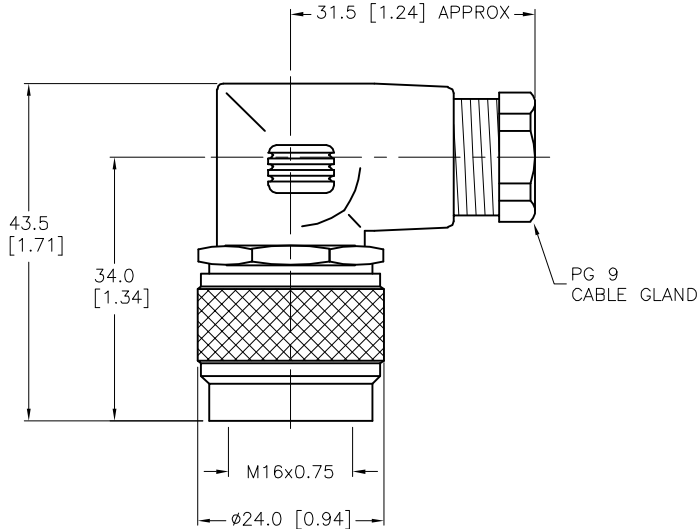

SOURCE DRAWING - FOR REFERENCE ONLY

A				DRAWING RELEASE				RDS	03/31/06				
REV				DESCRIPTION				BY	DATE	ECO. NO.			
RELATED DOCUMENTS				1. 2. 3. 4.				MATERIAL				SEE SPECIFICATIONS	
FINISH				SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION					
3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				DRFT				RDS	
				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				APVD				SCALE	
				UNIT OF MEASUREMENT				DATE				03/31/06	
				MILLIMETER [INCH]				SCALE				1=1.0	
				DO NOT SCALE THIS DRAWING				DESCRIPTION				WBK 14-0	
								IDENTIFICATION NO.				U2-07165	
								REV				A	
								FILE: U2-07165				SHEET 1 OF 1	