

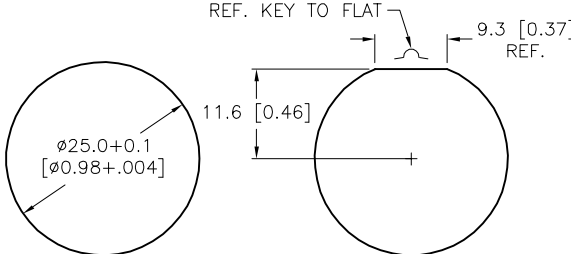
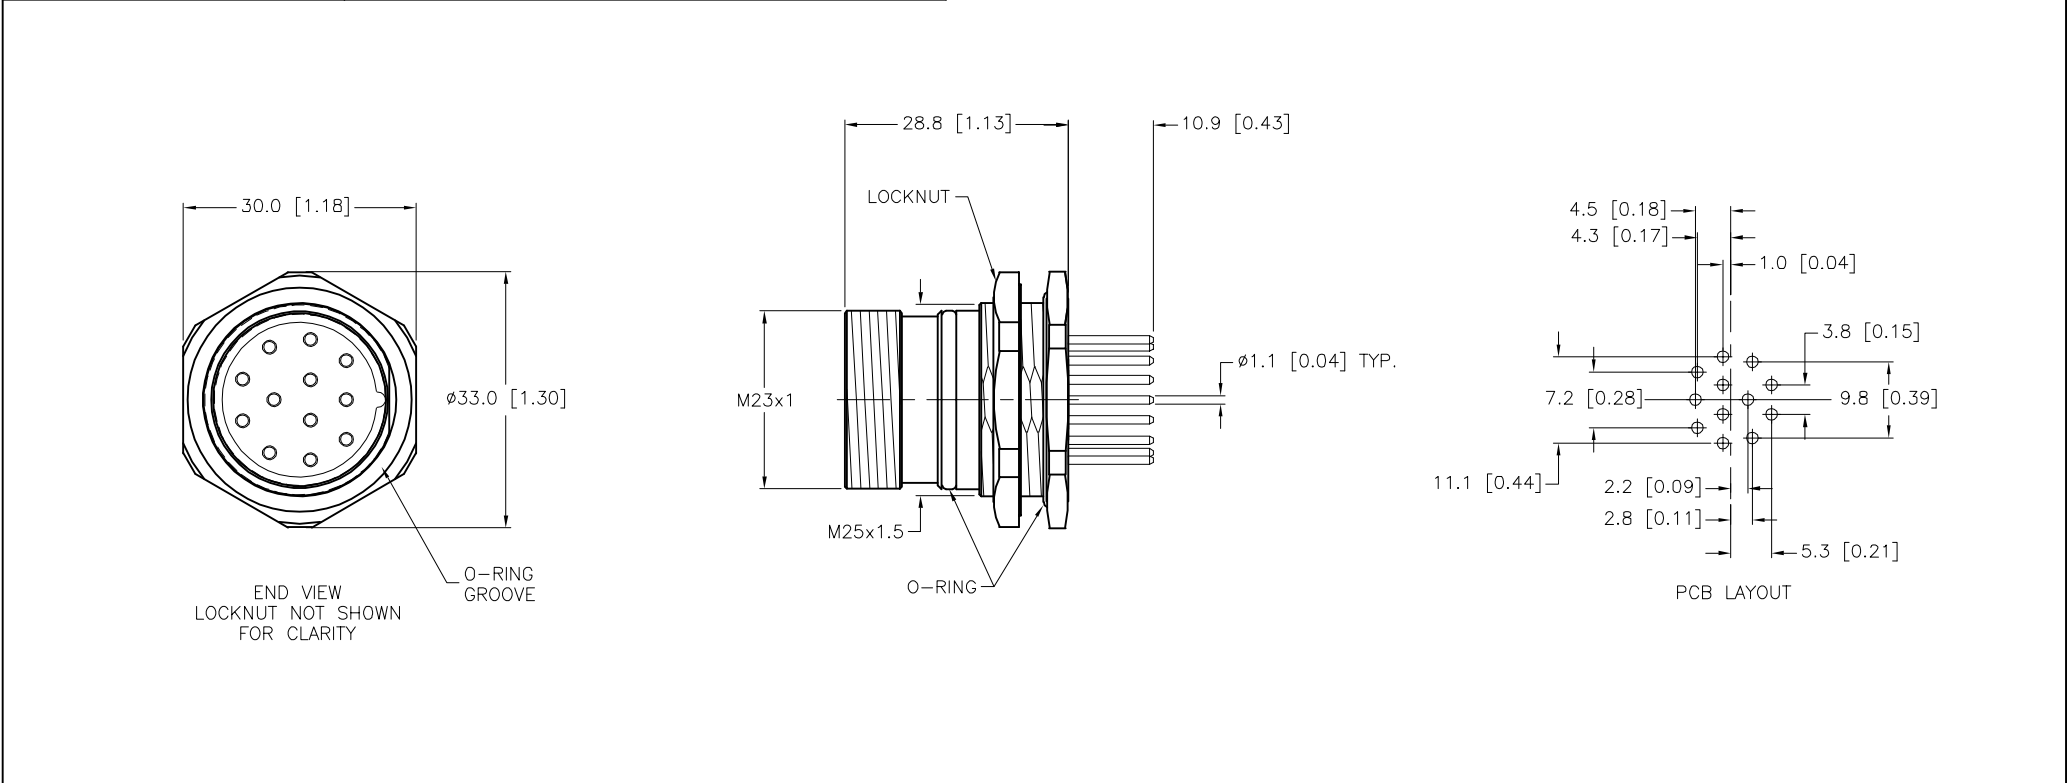


FEMALE END VIEW		PANEL CUTOUT (TYPICAL)		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	NYLON PBT/WHITE
 M23 connector				CONTACT MATERIAL/PLATING	BRASS/GOLD
				CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
				SEALING RING	BUNA N OR FLUOR RUBBER
				RATED CURRENT [A]	6.0 A MAX.
				RATED VOLTAGE [V]	150 V
				CONDUCTORS	12 PRINTED CIRCUIT PINS
				TEMPERATURE RATING	-40° to +125°C (-40°F to +257°)
				PROTECTION CLASS	IEC IP67
				MAX. PANEL THICKNESS	6.5mm [.256]



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.				3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS				DRFT RDS APVD		DATE 08/15/06 SCALE 1=1.0		DESCRIPTION CKFD 12-PCBL	
FINISH SEE SPECIFICATIONS				UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-07597		REV A	
A DRAWING RELEASE RDS 09/10/10				CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-07597	
REV DESCRIPTION BY DATE ECO NO.								SHEET 1 OF 1	