



MALE END VIEW




M16 connector

LOCKNUT

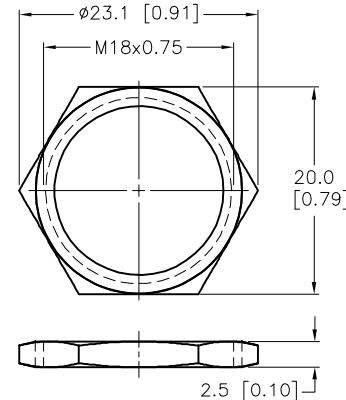


PANEL CUTOUT/OPTIONS



SPECIFICATIONS

CONTACT CARRIER MATERIAL	PBT
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
RATED CURRENT [A]	7.0 A
RATED VOLTAGE [V]	125 V AC/DC
NUMBER OF CONDUCTORS [AWG]	SOLDER CUPS
TEMPERATURE RANGE	-40°C to -105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67
MAX PANEL THICKNESS	4.0mm [0.16"]

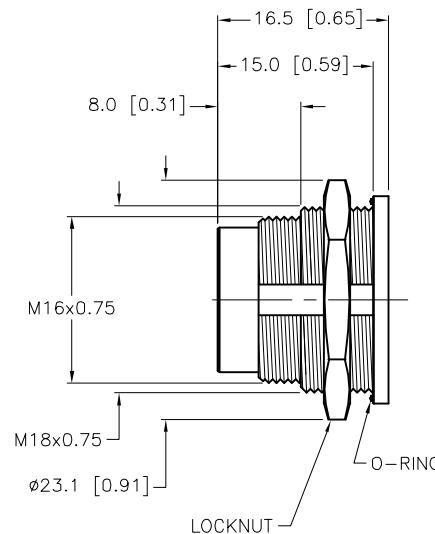


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

DRFT

RDS

DATE 05/25/17

APVD

SCALE 1=.7

DESCRIPTION

BSFD 7

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO.

U2-09775

REV

A

DRAWING RELEASE

RDS 05/25/17

REV

BY

DATE

ECO NO.

SHEET 1 OF 1