



MALE END VIEW



M23 connector

FEMALE END VIEW(J1-J4)



Euro fast

SPECIFICATIONS

MATERIAL



HOUSING/COLOR	NYLON/BLACK
RECEPTACLES	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON/BLACK (J1-J4), PBT/WHITE (P1)
CONTACTS	BRASS/GOLD
SEALING RING	VITON O-RINGS

ELECTRICAL DATA

RATED CURRENT [A]	4.0 AMPS
RATED VOLTAGE [V]	150 V

MECHANICAL DATA

OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED

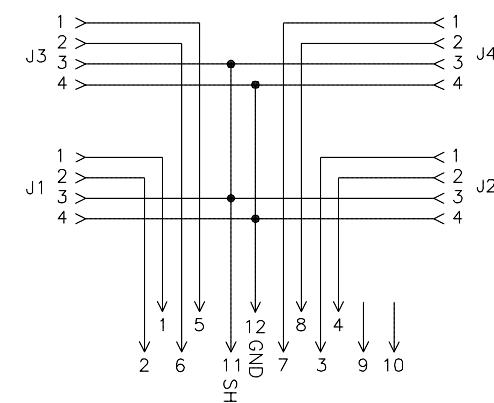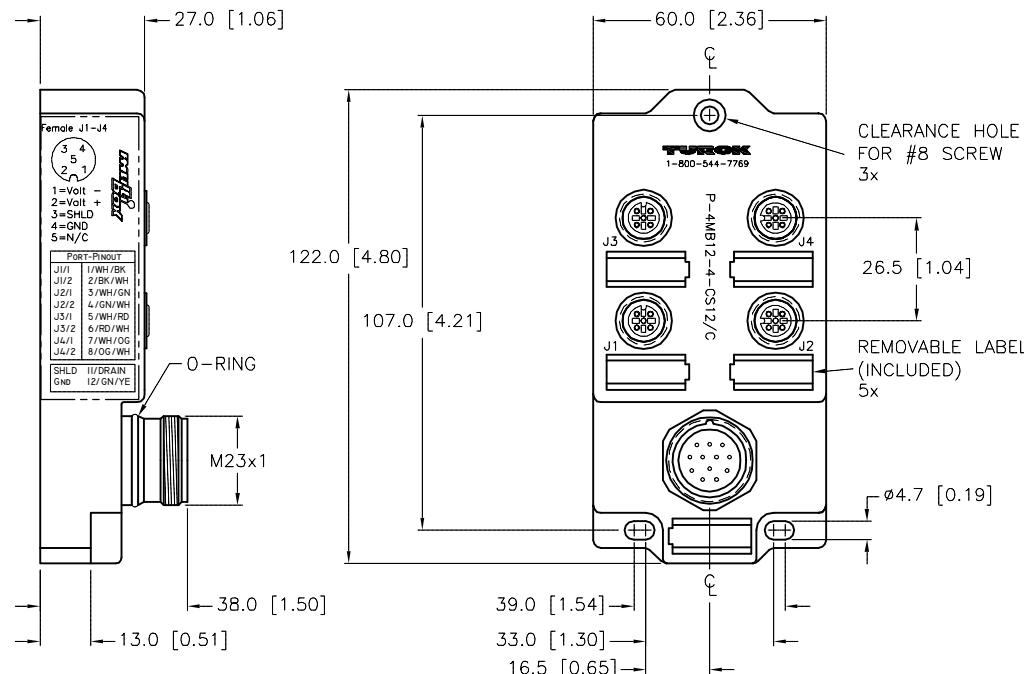


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT

APVD

RWC

SCALE

DATE 03/12/07

1=2.0

UNIT OF MEASUREMENT

IDENTIFICATION NO.

REV

TURCK INC
High Technology Sensors and Automation Controls

P-4MB12-4-CS12/C

U2-10238

C

SEE SPECIFICATIONS

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

FINISH

CONTACT TURCK
FOR MORE
INFORMATION

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

FILE: U2-10238

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

turck.com



CLOSURE CAPS
(2 INCLUDED)

C UPDATED CLOSURE CAPS

TV 09/18/15 48811

REV DESCRIPTION

BY DATE ECO NO.

SHEET 1 OF 1