




MALE END VIEW (P1)



FEMALE END VIEW (J1-J8)



1=Volt -
2=Volt +
3=Shield
4=Ground



SPECIFICATIONS

MATERIAL




HOUSING/COLOR	NYLON/BLACK
RECEPTACLES	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON/BLACK (J1-J8), PBT/WHITE (P1)
CONTACTS	BRASS/GOLD
SEALING RING	VITON O-RINGS

ELECTRICAL DATA

OPERATING VOLTAGE	150 V
OPERATING CURRENT	4.0 AMPS

MECHANICAL DATA

PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)

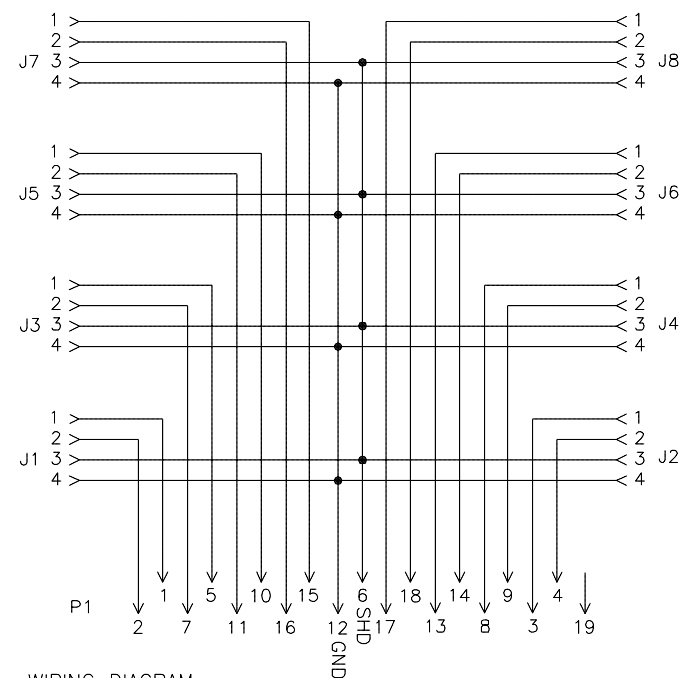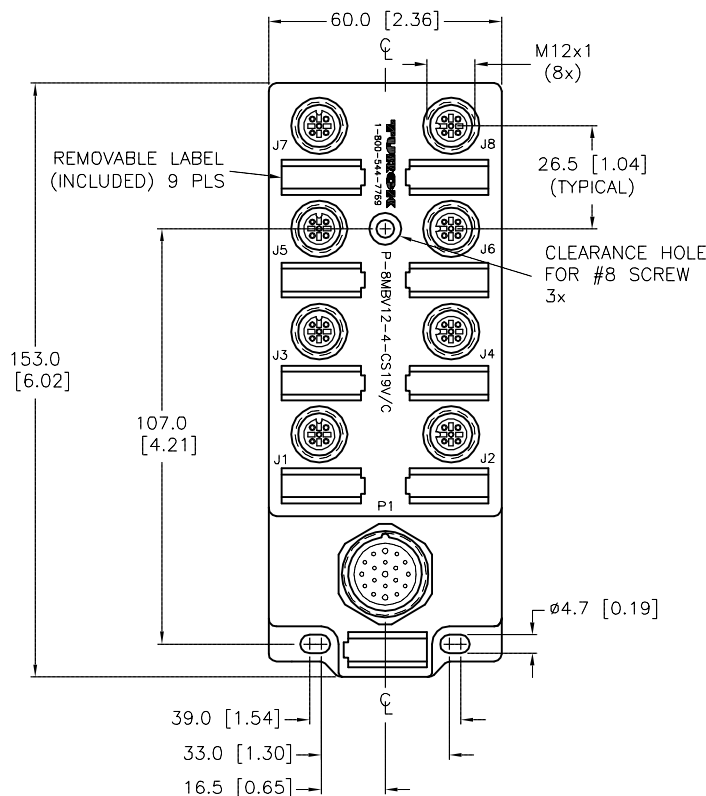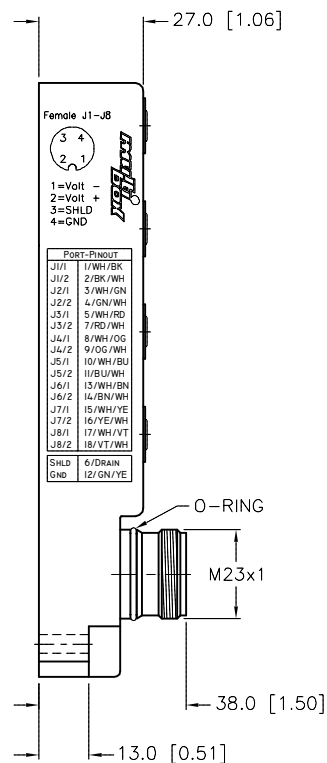


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY



CLOSURE CAPS
(2 INCLUDED)

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
						
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RWC	DATE	03/12/07	DESCRIPTION
SEE SPECIFICATIONS		APVD		SCALE	1=2.0	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.			REV
SEE SPECIFICATIONS			U2-10250			C
		FILE: U2-10250			SHEET 1 OF 1	

C	UPDATED CLOSURE CAPS	TV	09/18/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.