



MALE END VIEW



 *M23 connector*

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT OR NYLON/GRAY
CONTACT MATERIAL/PLATING	CuZn/GOLD
COUPLING NUT MATERIAL/PLATING	CuZn/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	17 AWG MAX
TERMINATION METHOD	SOLDER
TEMPERATURE	−40°C to 125°C (−40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	5mm (.197") TO 10mm (.394")

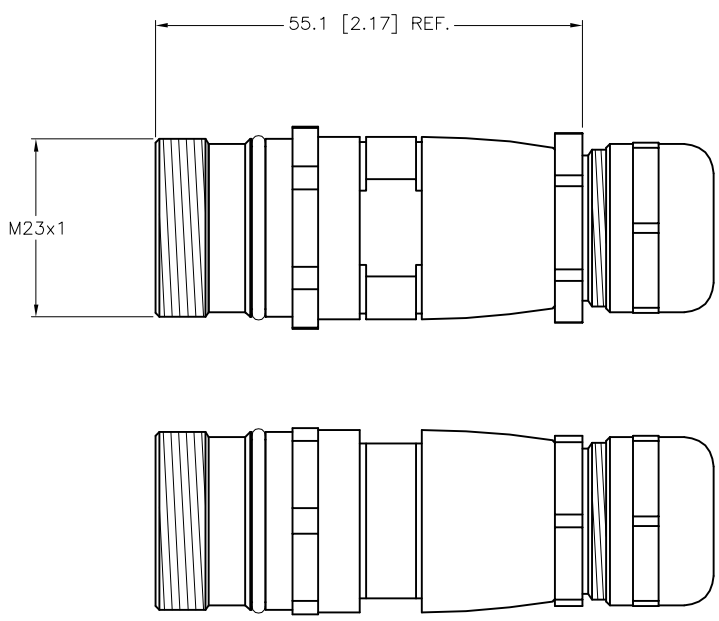

NOTES:


1. THE CABLE GLAND IS PG 13.5 CABLE GLAND.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC

APVD

DATE 06/08/09

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION

CSS 17-0

IDENTIFICATION NO.

U2-10278

REV

A

A	DRAWING RELEASE	RWC	06/08/09	26577
REV	DESCRIPTION	BY	DATE	ECO NO.