




## MALE END VIEW


## FEMALE END VIEW

## TYPICAL PANEL CUTOUT


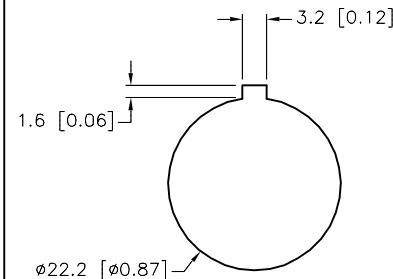



## SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67
ACCOMMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)
GASKET MATERIAL	NITRILE

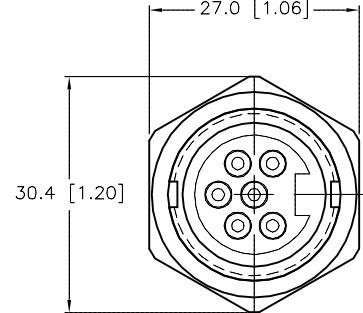

LOCKNUT AND WASHERS  
NOT SHOWN FOR  
CLARITY

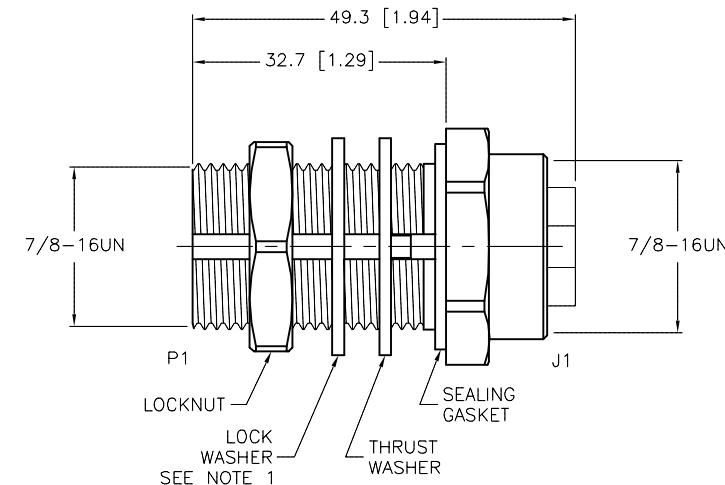

## NOTE(S):

1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax <a href="http://www.turck.us">www.turck.us</a>
1. 2. 3. 4.			DRFT	GAR	DATE 02/13/07
			APVD		SCALE 1=1.0
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION
MATERIAL	SEE SPECIFICATIONS		MILLIMETER [ INCH ]		RSFV RKFV 60/22
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.	REV
				U2-11171	C
REV	DESCRIPTION		FILE: U2-11171	SHEET 1 OF 1	