





MALE END VIEW (P1)	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
  M16 connector	  M16 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
			CONTACT CARRIER MATERIAL	TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TeCu (J1,J2)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	15.0 A
			RATED VOLTAGE [V]	600 VAC/VDC
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS IEC IP67

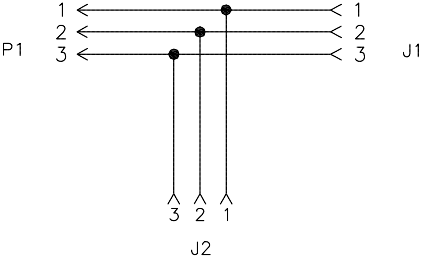


SOURCE DRAWING - FOR REFERENCE ONLY

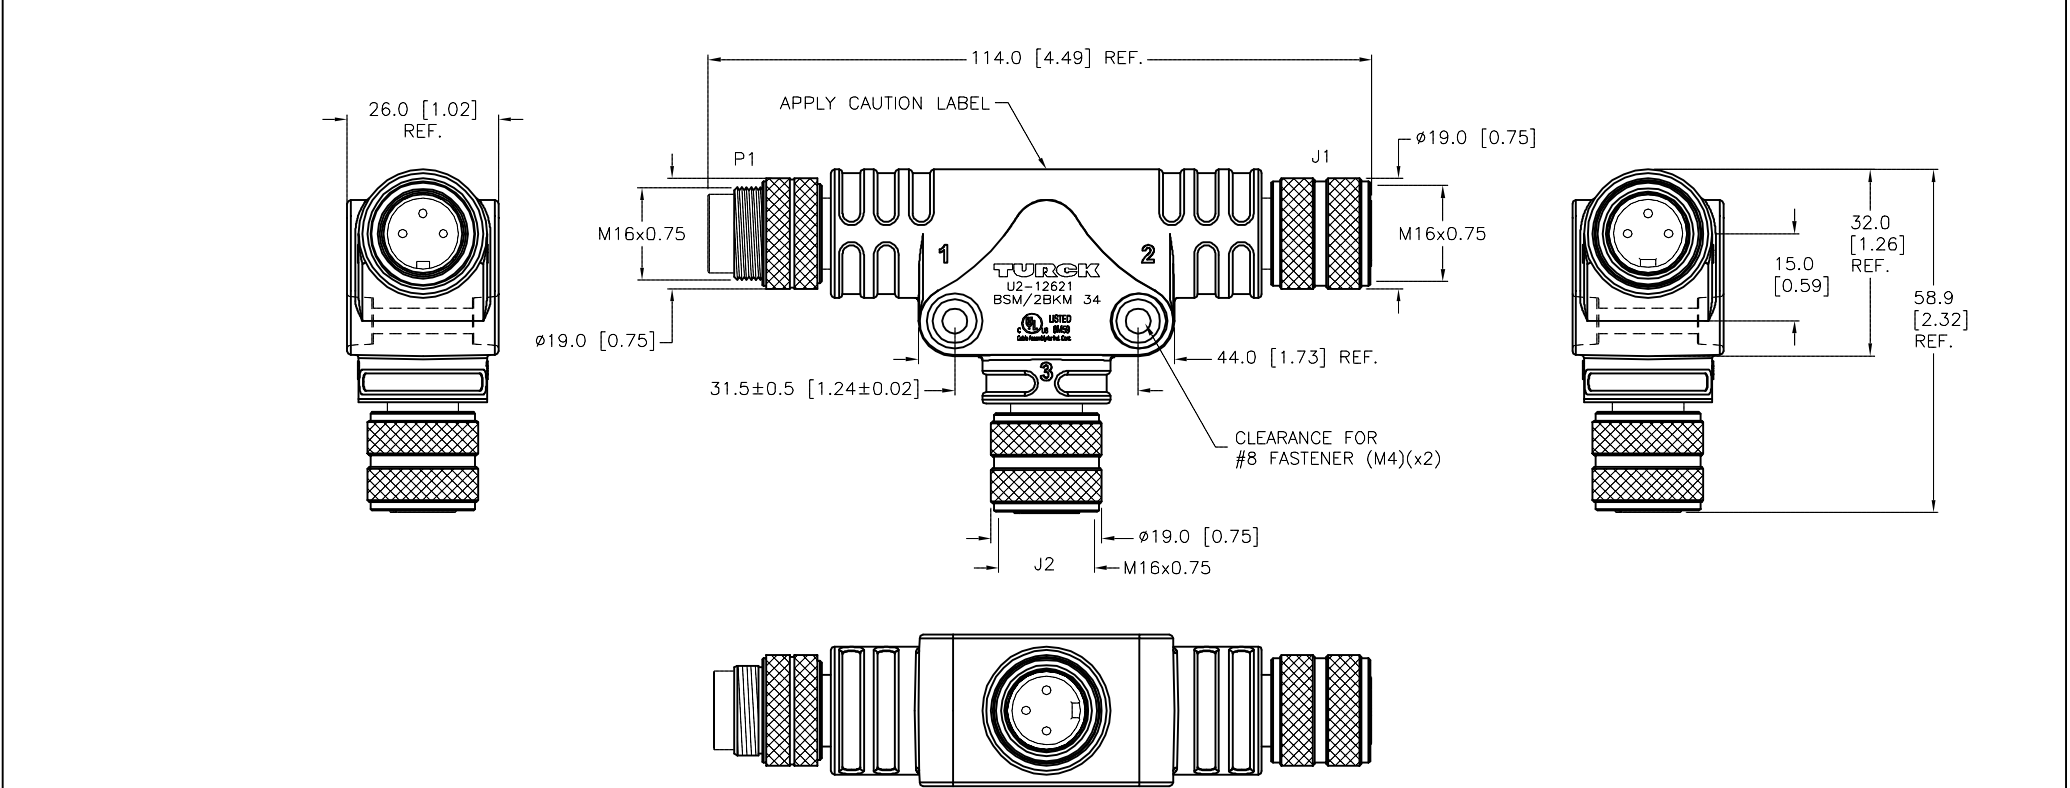

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 11/26/07		DESCRIPTION BSM/2BKM 34	
					SEE SPECIFICATIONS				APVD		SCALE 1 = 1.3			
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV				
						MILLIMETER [INCH]		U2-12621		E				
DO NOT SCALE THIS DRAWING								FILE: U2-12621		SHEET 1 OF 1				
E	UPDATE CLICH PER ECO			KMY	03/08/13	41196								
REV	DESCRIPTION			BY	DATE	ECO NO.								