


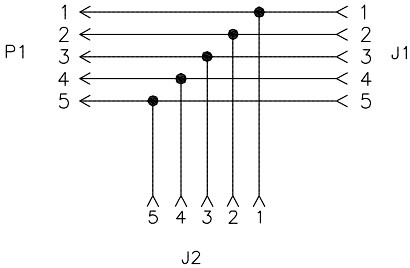
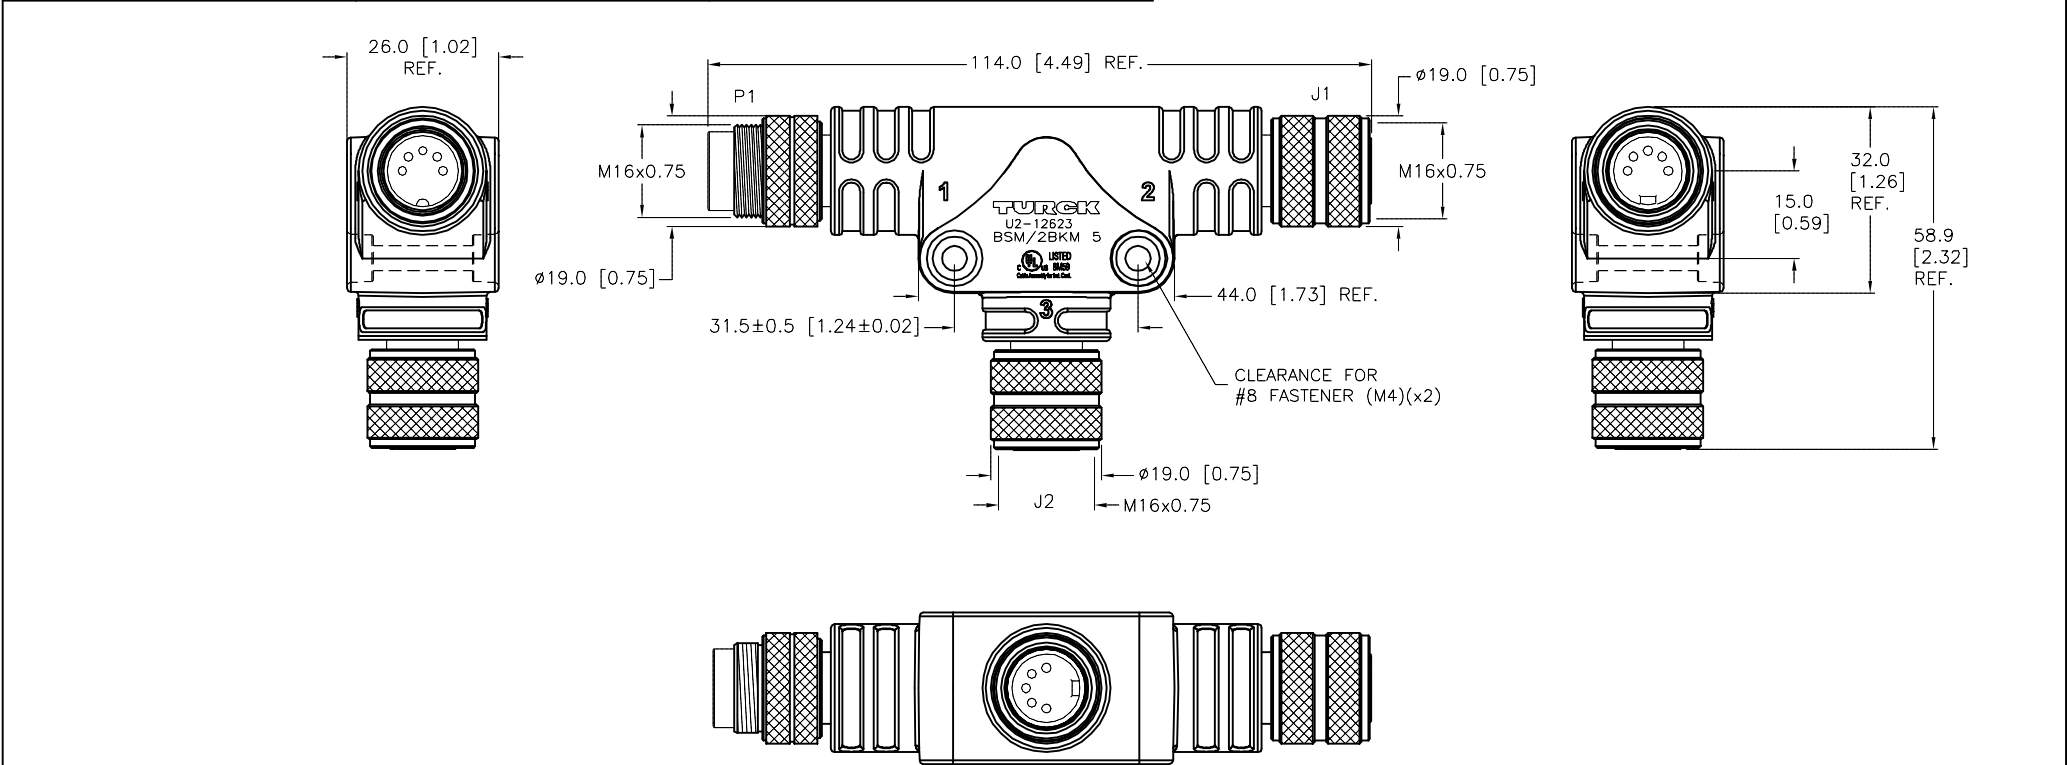


MALE END VIEW (P1)	FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
  M16 connector	  M16 connector		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT CARRIER MATERIAL	TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	8.0 A
			RATED VOLTAGE [V]	125 VAC/VDC
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RDS		DATE 11/26/07	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH				MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		BSM/2BKM 5	
SEE SPECIFICATIONS								IDENTIFICATION NO.	
								U2-12623	
								REV	
								D	
D UPDATE CLICHE PER ECO				KMY 03/08/13 41196				FILE: U2-12623	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	