




FEMALE END VIEW		SPECIFICATIONS	
		CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING/LOCKNUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATE
		GASKET	RUBBER (NBR or FPM)
		RATED CURRENT [A]	9.0 A (PINS 6,12,19) 2.0 A (ALL OTHER PINS)
		RATED VOLTAGE [V]	150 V
		TERMINATION METHOD	SOLDER LUG
		MAX CONDUCTOR SIZE	3x18 AWG, 16x22 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS IP65



M23 connector

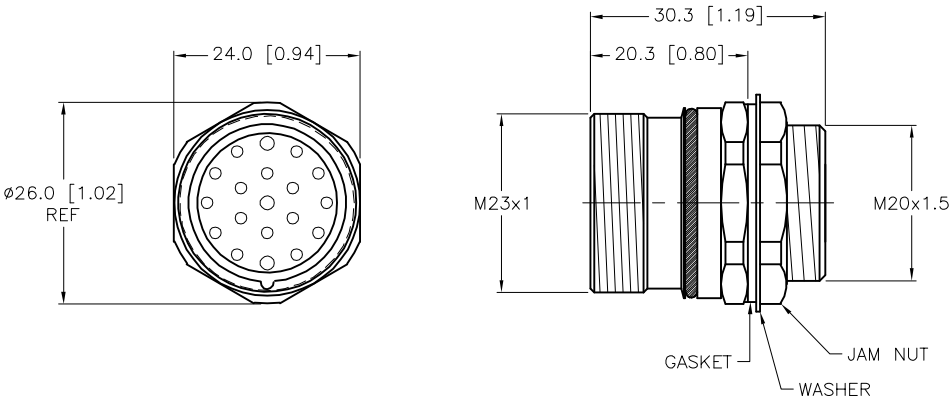

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RWC		DATE 11/08/07	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH				SEE SPECIFICATIONS		MILLIMETER [INCH]		IDENTIFICATION NO.	
						DO NOT SCALE THIS DRAWING		CKFLV 19-0	
								R2-12746	
								REV A	
								FILE: U2-12746	
								SHEET 1 OF 1	