


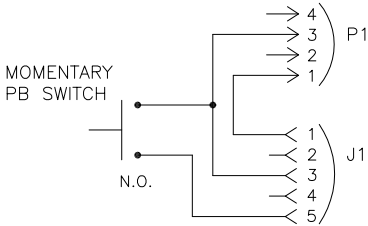
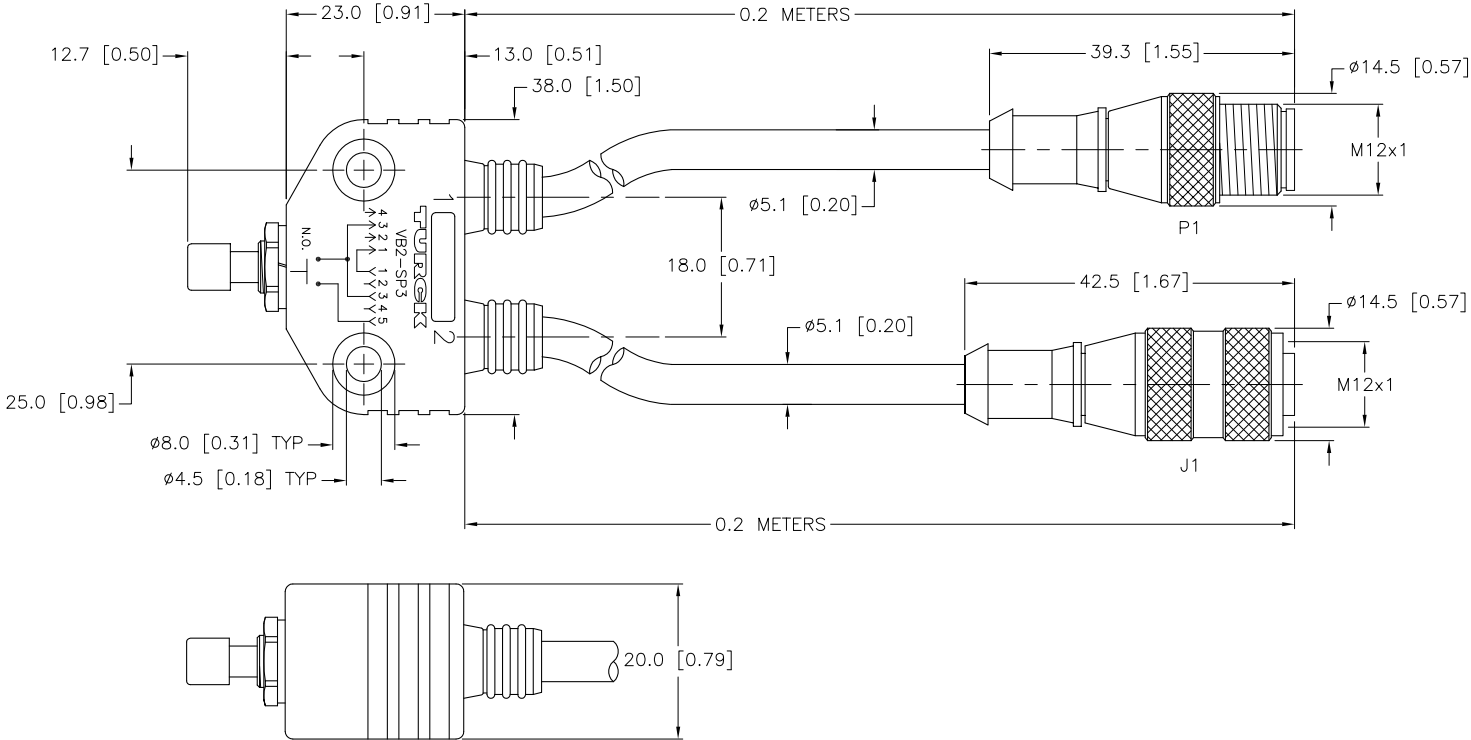


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	3.0 A
			RATED VOLTAGE [V]	125 V
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1 AND IEC IP40



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

ALL LENGTHS STRIP LENGTH 0-7mm 8-29mm 30-49mm 50-69mm 70-100mm OVER 100mm + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER TOLERANCE ±0.5mm ±1.0mm ±2.0mm ±3.0mm ±4.0mm ±5.0mm					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com									
					1.															
					2.															
					3.															
					4.															
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT				RDS		DATE 08/07/07		DESCRIPTION		VB2-SP3	
					SEE SPECIFICATIONS				DSGN				SCALE 1 = 1.0							
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		MILLIMETER [INCH]		IDENTIFICATION NO.		U2-12907		REV		F						
SEE SPECIFICATIONS																				
F		ADD LOCK WASHER			CK		05/25/11		35275											
REV		DESCRIPTION			BY		DATE		ECO NO.											

FILE: U2-12907		SHEET 1 OF 1	
----------------	--	--------------	--