




## FEMALE END VIEW

EURO  
FAST

## BOARD LAYOUT






## TYPICAL PANEL CUTOUT



## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	6 PRINTED CIRCUIT PINS
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

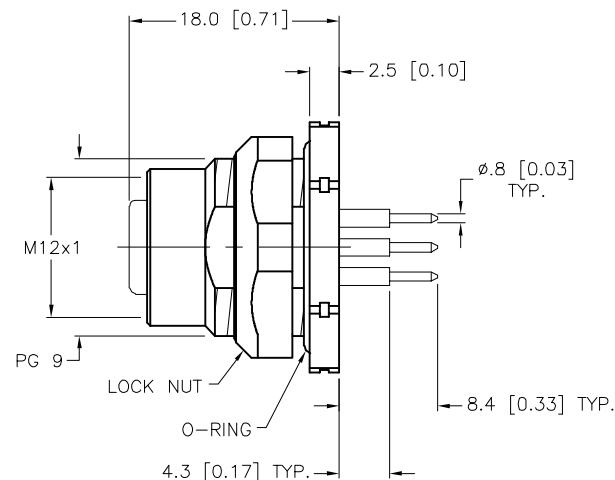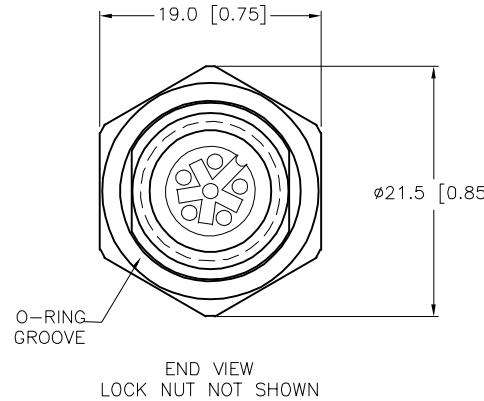

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.									
2.									
3.									
4.									
MATERIAL		RDRF RDS		DATE 11/14/07		DESCRIPTION		FKFDK 4.6	
SEE SPECIFICATIONS		APVD		SCALE 1=.7					
FINISH		UNIT OF MEASUREMENT							
SEE SPECIFICATIONS		MILLIMETER [ INCH ]							
CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING							
FILE: U2-12908		FILE: U2-12908						SHEET 1 OF 1	