
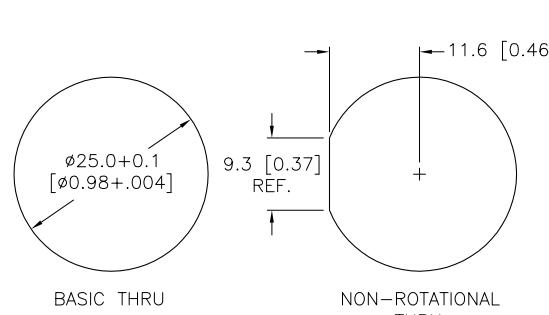


MALE END VIEW



PANEL CUTOUT (TYPICAL)

SPECIFICATIONS



M23 connector

CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING	BUNA N OR FLUOR RUBBER
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
TERMINATION METHOD	SOLDER LUG
MAXIMUM CONDUCTOR SIZE [AWG]	17 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IP65
MAXIMUM WALL THICKNESS	MAXIMUM IS 6.5 [0.25]

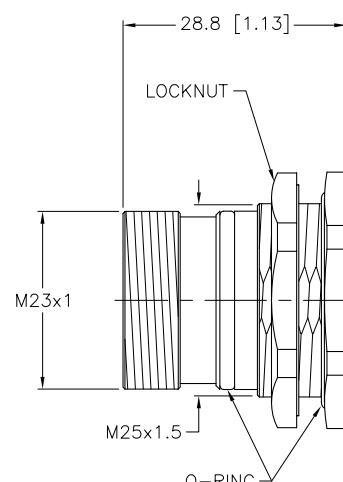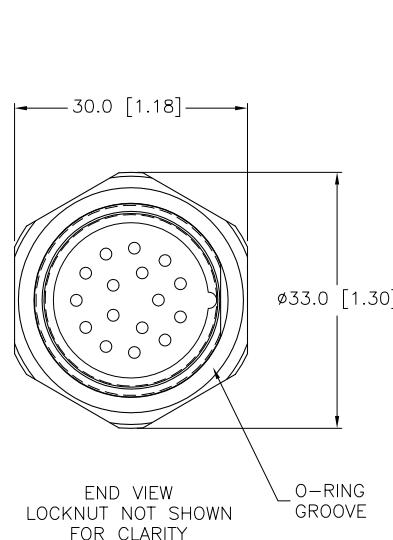

SOURCE DRAWING - FOR REFERENCE ONLY

NOTE:

1. CONTACT HOLDER ASSEMBLED AND UV CURED INTO HOUSING.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DESCRIPTION CSFD 16-0	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
		DRFT	RWC		
	APVD	SCALE	1=1.0		
	FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]	
SEE SPECIFICATIONS	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING	IDENTIFICATION NO. U2-12930	REV C
SEE SPECIFICATIONS				FILE: U2-12930	SHEET 1 OF 1

C	UPDATE SPECIFICATIONS	TR	09/27/11	36603
REV	DESCRIPTION	BY	DATE	ECO NO.