





MALE END VIEW



- 1 = BLUE (- VOLTAGE)
- 2 = BROWN (+ VOLTAGE)
- 3 = BARE (SHIELD)
- 4 = GREEN/YELLOW (GROUND)



FOUNDATION™
fieldbus

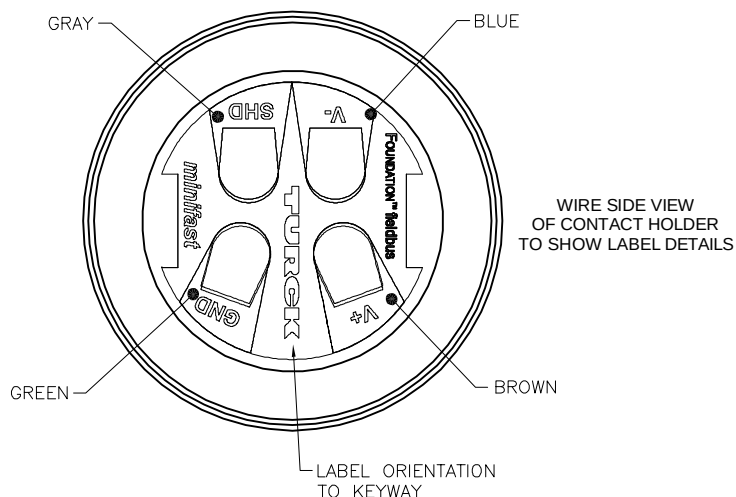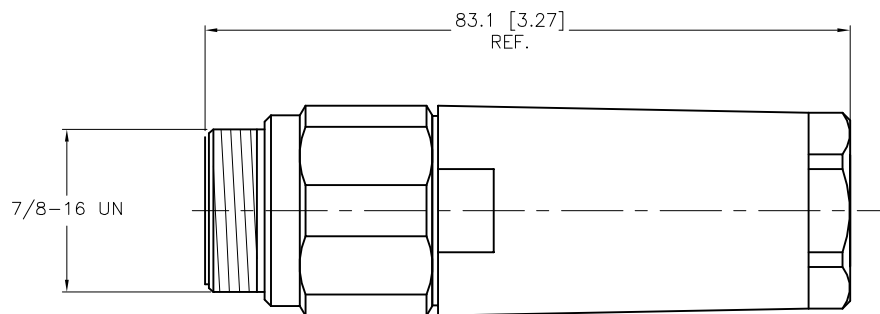


(SCALE 2:1)

SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL	STAINLESS STEEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
CABLE GRIP RANGE	PG 16 = 12–14mm
TEMPERATURE RATING	–40°C to +90°C (–40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
1. 2. 3. 4.								
MATERIAL		DRFT RDS		DATE 05/16/08		DESCRIPTION BSV 4140-0/16/FF		
SEE SPECIFICATIONS		APVD		SCALE 1=1.0				
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-13613				REV B
SEE SPECIFICATIONS				FILE: U2-13613				SHEET 1 OF 1
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING				

B	UPDATE LABEL VIEW TO SHOW LABEL ORIENTATION TO KEYWAY	WBS	04/08/13	41853
REV	DESCRIPTION	BY	DATE	ECO. NO.