



## FEMALE END VIEW






- 1 = BROWN (+ VOLTAGE)  
 2 = N/C  
 3 = BLUE (- VOLTAGE)  
 4 = N/C



## SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIER MATERIAL/COLOR	PLASTIC, TPU/BLACK
CABLE GRIP MATERIAL/COLOR	PLASTIC, PA/BLACK
COUPLING NUT MATERIAL	ANODIZED ALUMINUM
SEAL MATERIAL	PLASTIC, NBR
SCREW-IN THREAD SEAL MATERIAL	PLASTIC, NBR
DEGREE OF PROTECTION	IP67
CABLE GRIP RANGE	ø6-8mm
SCREW-IN THREAD	PG 9
RATED VOLTAGE [V]	250 V MAX.
INSULATION RESISTANCE	$\geq 10 \Omega^9$
RATED CURRENT [A]	9.0 A
FORWARD RESISTANCE	$\leq 5 m\Omega$
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)

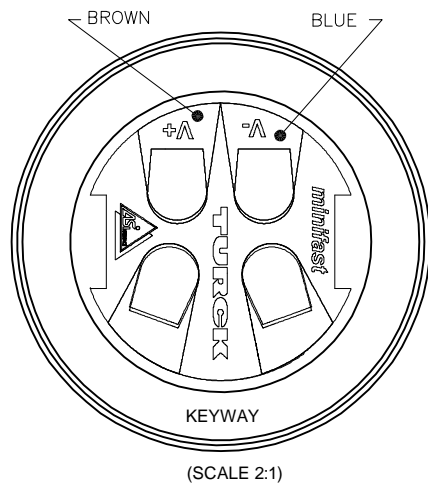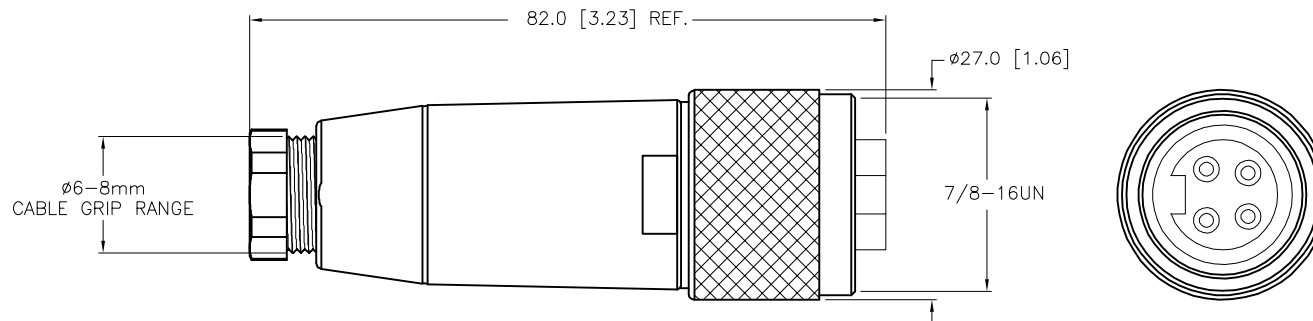

WIRE SIDE VIEW  
 OF CONTACT HOLDER  
 TO SHOW LABEL DETAILS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
1. 2. 3. 4.							
MATERIAL		DRFT	RDS	DATE	05/16/08	DESCRIPTION  BK 4140-0/9/ASI	
SEE SPECIFICATIONS		DSGN		SCALE	1=1.0		
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS		MILLIMETER [ INCH ]				U2-13619	
		DO NOT SCALE THIS DRAWING				REV	
						A	
						FILE: U2-13619	
						SHEET 1 OF 1	