



## MALE END VIEW




## SPECIFICATIONS

DEGREE OF PROTECTION	IP 20
WIRE GAUGE DATA	22-26 AWG
OPERATING TEMPERATURE	-20°C to +70°C (-4°F to +158°F)
CABLE SHEATH DIAMETER	ø6-7mm
TRANSFER RATE	100 Mbit/s; Cat 5e

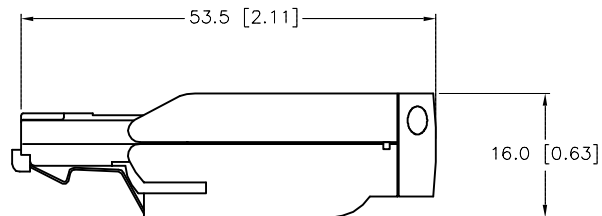

CLOSED CONNECTOR

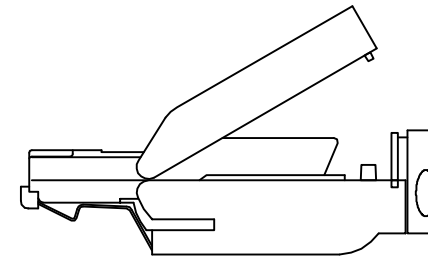CONNECTOR OPENED TO  
INSERT CONDUCTORS

SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

1. ALL DIMENSIONS REFERENCE.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div><b>TURCK INC</b> <i>High Technology Sensors and Automation Controls</i></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>				
1. 2. 3. 4.								
MATERIAL		DRFT RDS		DATE 04/25/08		DESCRIPTION CONNECTOR, RJ45S 42 IDC		
		APVD		SCALE 1 = 1.0				
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO.		REV
						U2-13637		C
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-13637		SHEET 1 OF 1