




# MALE END VIEW



- 1 = BARE (SHIELD)
- 2 = RED (+ VOLTAGE)
- 3 = BLACK (- VOLTAGE)
- 4 = WHITE (CAN\_H)
- 5 = BLUE (CAN\_L)




## WIRE SIDE VIEW OF CONTACT HOLDER TO SHOW LABEL DETAILS

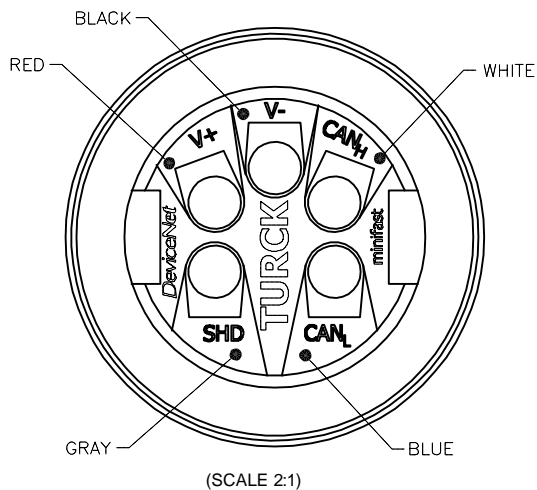

# SPECIFICATIONS


HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)
PROTECTION CLASS	IP 67
CABLE GRIP RANGE	MODIFIED TO FIT 16 MM DIAM. CABLE

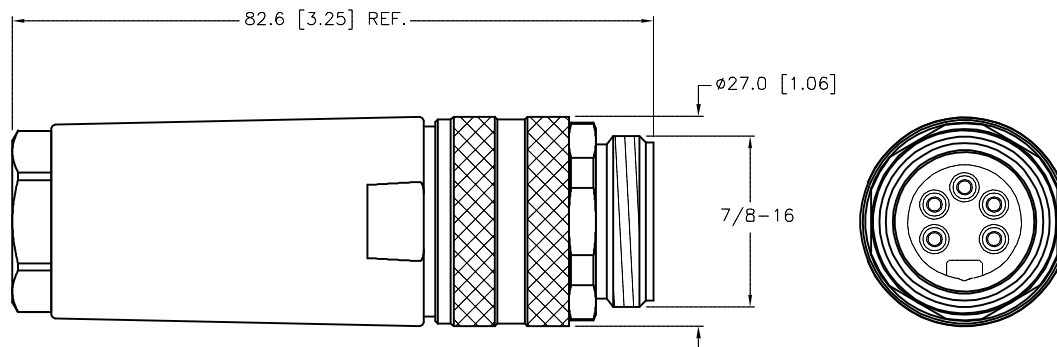

## SOURCE DRAWING - FOR REFERENCE ONLY

### NOTES:

1. "/C1232" DESIGNATES FIELD WIRABLES WITH ENLARGED GROMIT.

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION  	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> <div><b>TURCK</b></div>							
	MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	05/05/08	DESCRIPTION  BS 4151-0/16/DNET/C1232
	SEE SPECIFICATIONS						APVD		SCALE	1=1.0	
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.  U2-13640		REV  D				
SEE SPECIFICATIONS		MILLIMETER [ INCH ]									
		DO NOT SCALE THIS DRAWING			FILE: U2-13640	SHEET 1 OF 1					

D	UPDATE TEMP RATING	NF	08/16/17	61580
REV	DESCRIPTION	BY	DATE	ECO NO.