
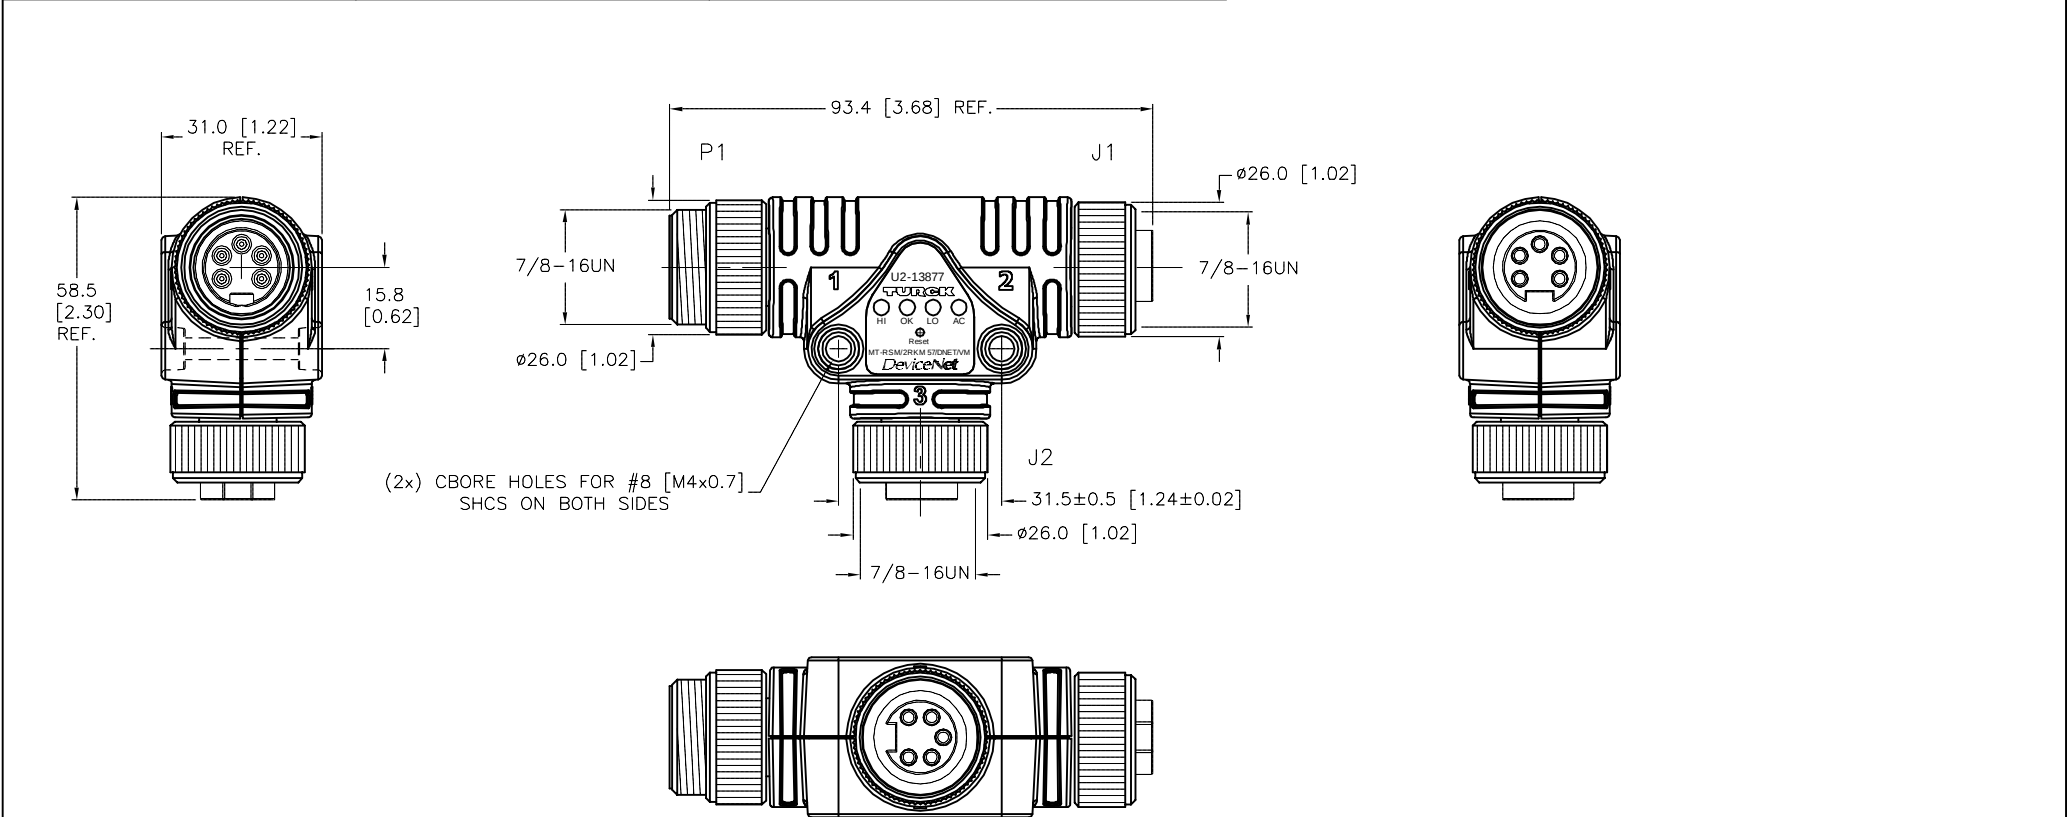


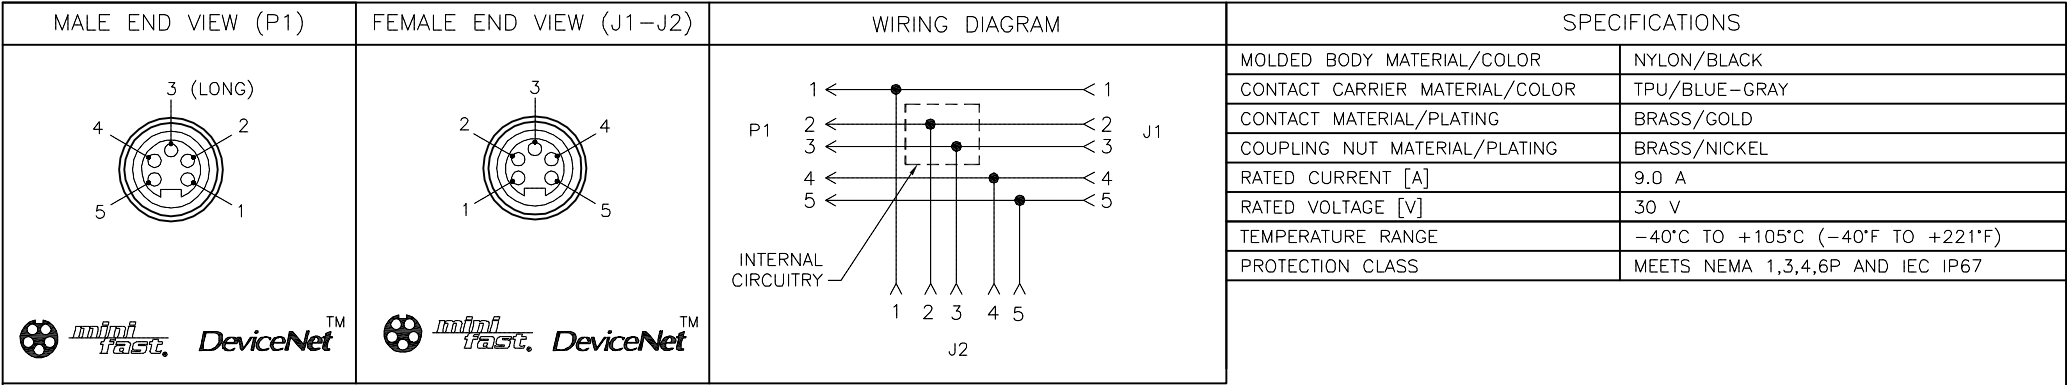

ELECTRICAL CHARACTERISTICS:
POWER SUPPLY - 7V-30VDC

LED INDICATORS
LOW VOLTAGE THRESHOLD - 12.4V (MINIMUM)
"OK" VOLTAGE THRESHOLD - 12.96V - 24.78V
HIGH VOLTAGE THRESHOLD - 25.3V (MAXIMUM)
GLITCH THRESHOLD - 1.26V (1.6MS RISE TIME), 0.67V (1MS RISE TIME)
RIPPLE THRESHOLD - 1.5V P-P 20-250HZ, 2.6V P-P 10-20H

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.					DRFT RDS		DATE 05/06/09		DESCRIPTION MT-RSM/2RKM 57/DNET/VM	
MATERIAL SEE SPECIFICATIONS					APVD		SCALE 1=1.5		IDENTIFICATION NO. U2-13877	
FINISH SEE SPECIFICATIONS					UNIT OF MEASUREMENT MILLIMETERS		DO NOT SCALE THIS DRAWING		REV B	
B ADD ELECTRICAL CHARACTERISTICS					RDS		03/27/13		41683	
REV DESCRIPTION					BY		DATE		ECO NO.	
									FILE: U2-13877	
									SHEET 1 OF 1	