



FEMALE END VIEW




 M16 connector

SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON or PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or TeCU/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	18.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	12 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	−40°C to +90°C (−40°F to +194°F)
PROTECTION CLASS	IP 67/NEMA 6P
CABLE GRIP RANGE	PG 11 = 8–11mm

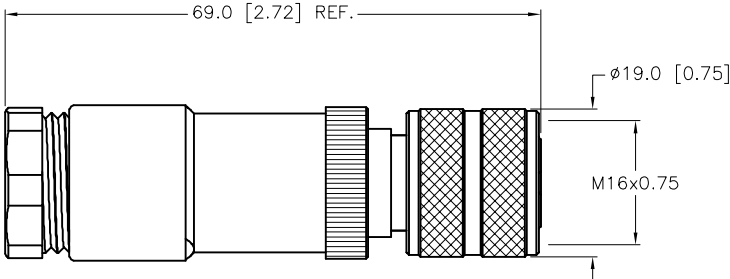

WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

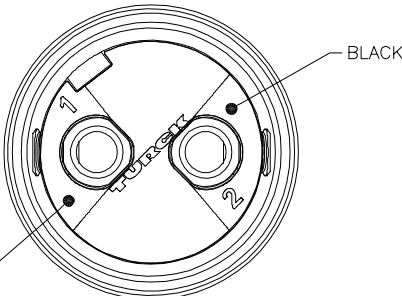

(SCALE 2:1)



CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE
PROJECTION



ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT

RDS

APVD

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DATE 12/02/08

SCALE 1=1.0

DESCRIPTION

BK 22-0

IDENTIFICATION NO.

U2-14091

REV

B

FILE: U2-14091

SHEET 1 OF 1

B

ADD CAUTION LABEL

RDS

04/30/09

26068

REV

DESCRIPTION

BY

DATE

ECO. NO.