


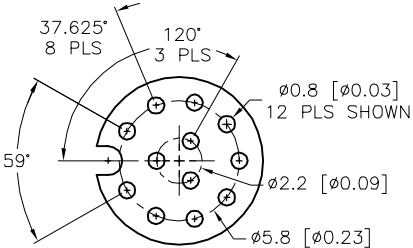

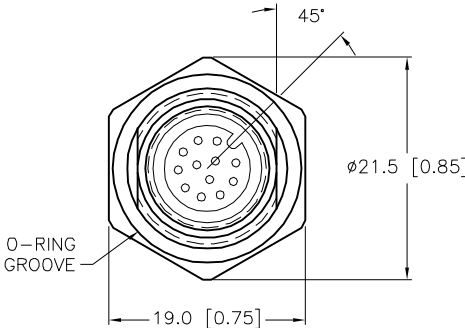



FEMALE END VIEW		BOARD LAYOUT (2:1)		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
				O-RING MATERIAL	NITRILE
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	30 V
				CONDUCTORS	PCB PINS
				TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
				MAX. PANEL THICKNESS	3.0 [0.12]

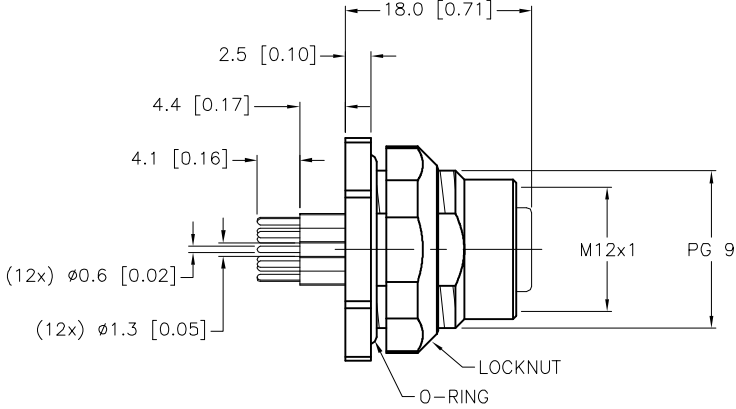

MOUNTING HOLE



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT RDS		DATE	04/09/08	DESCRIPTION FKFDK 12-PCB	
SEE SPECIFICATIONS					APVD		SCALE	1=.75		
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		U2-14344	
							DO NOT SCALE THIS DRAWING		FILE: U2-14344	
D UPDATE VOLTAGE RATING					CBM		DATE	02/21/23	78300	
REV DESCRIPTION					BY		DATE		ECO NO.	