



## FEMALE END VIEW

## WIRING DIAGRAM

## MALE END VIEW







J1 P1  
 1 → 1  
 2 → 2  
 3 → 3  
 4 → 4



**micro**  
**fast**

## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
GASKET MATERIAL	NITRILE (BUNA N)
ISOLATOR MATERIAL	NYLON
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

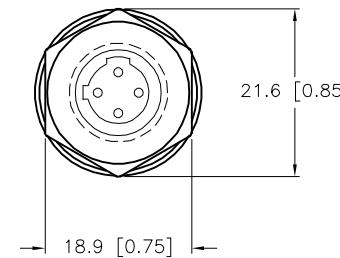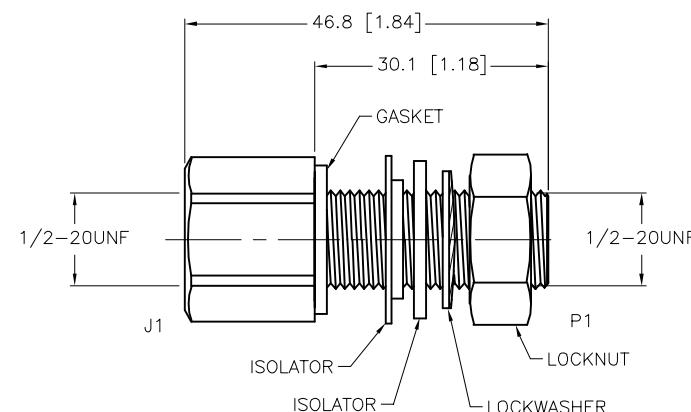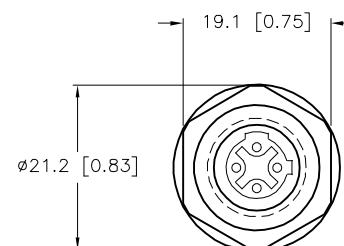

PANEL CUT-OUT  
SEE NOTES

## SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

1. TYPICAL PANEL CUT-OUT USING ISOLATORS IS 0.625 DIA. HOLE.
2. TYPICAL PANEL CUT-OUT WITHOUT ISOLATORS IS 0.50 DIA. HOLE.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DATE 07/29/08	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
				APVD	SCALE 1=1.0
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	DESCRIPTION	FKBV FSBV 4	
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [ INCH ]	IDENTIFICATION NO.	U2-14360	REV B
		DO NOT SCALE THIS DRAWING	FILE: U2-14360	SHEET 1 OF 1	

B UPDATE PROTECTION CLASS \*CK 06/28/10 31556

BY DATE ECO NO.

REV DESCRIPTION