



FEMALE END VIEW

WIRING DIAGRAM

MALE END VIEW




J1		P1	
1	→ 1		
2	→ 2		
3	→ 3		
4	→ 4		
5	→ 5		



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
GASKET MATERIAL	NITRILE (BUNA N)
ISOLATOR MATERIAL	NYLON
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

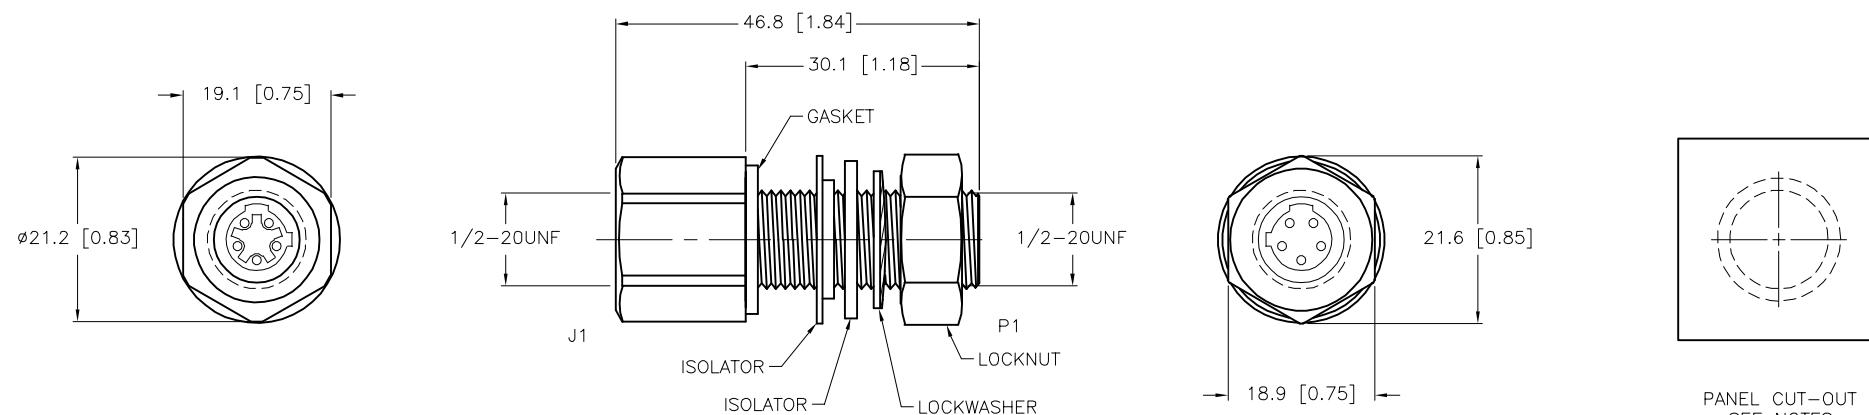

PANEL CUT-OUT
SEE NOTES

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
	1.	2.			
MATERIAL	DRFT	RDS	DATE 07/29/08	DESCRIPTION	FKBV FSBV 5
SEE SPECIFICATIONS	APVD	SCALE 1=1.0			
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT	IDENTIFICATION NO.	REV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]	U2-14361	B
	DO NOT SCALE THIS DRAWING			FILE: U2-14361	SHEET 1 OF 1

NOTES:

1. TYPICAL PANEL CUT-OUT USING ISOLATORS IS 0.625 DIA. HOLE.
2. TYPICAL PANEL CUT-OUT WITHOUT ISOLATORS IS 0.50 DIA. HOLE.

B	UPDATE PROTECTION CLASS	*CK	06/28/10	31556
REV	DESCRIPTION	BY	DATE	ECO NO.

B	UPDATE PROTECTION CLASS	*CK	06/28/10	31556
REV	DESCRIPTION	BY	DATE	ECO NO.