
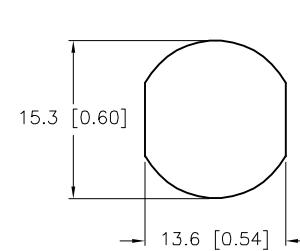
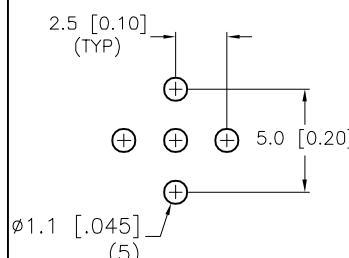


MALE END VIEW

BOARD LAYOUT

TYPICAL PANEL CUTOUT

SPECIFICATIONS

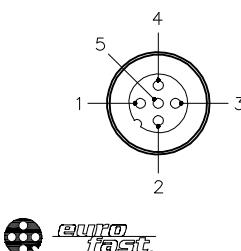

CONTACT CARRIER MATERIAL

NYLON OR TPU

CONTACT MATERIAL/PLATING

BRASS/GOLD

HOUSING, LOCKNUT MATERIAL/FINISH

STAINLESS STEEL/PASSIVATED

O-RING MATERIAL

NITRILE

RATED CURRENT [A]

4.0 A

RATED VOLTAGE [V]

250 V

NUMBER OF CONDUCTORS [AWG]

5 PRINTED CIRCUIT PINS

TEMPERATURE RANGE



-40°C to +80°C (-40°F to +176°F)

PROTECTION CLASS

MEETS NEMA 1,3,4,6P AND IEC IP68

MAX. PANEL THICKNESS

3.0 [0.12]

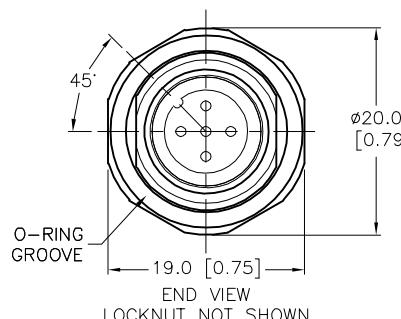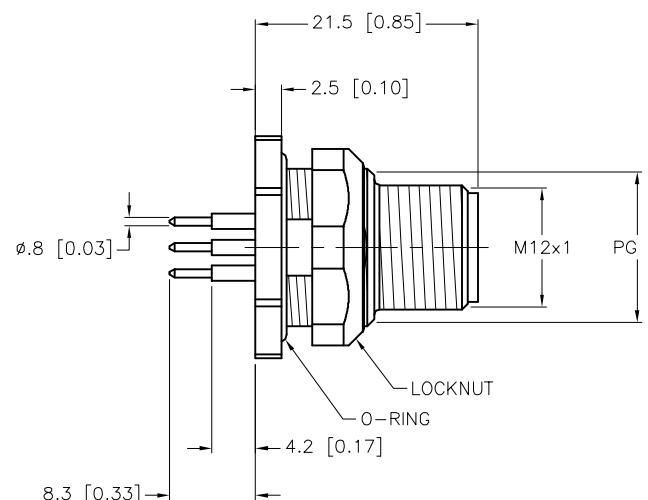


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

DRFT

RWC

DATE 08/15/08

DESCRIPTION

FSFDKV 4.5

APVD

SCALE 1=.8

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO.

U2-14500

REV D

FILE: U2-14500

SHEET 1 OF 1

D UPDATED DRAWING

AS 08/31/23

79189

REV DESCRIPTION

BY

DATE

ECO NO.