


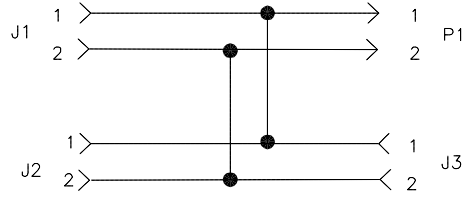
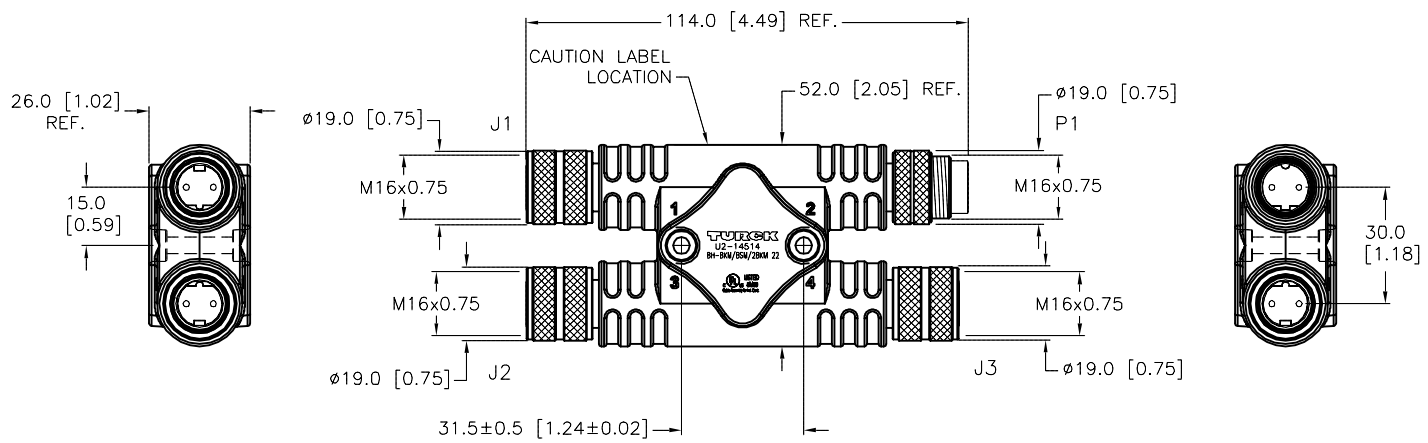


MALE END VIEW (P1)	FEMALE END VIEW (J1-J3)	WIRING DIAGRAM	SPECIFICATIONS		
			MOLDED BODY MATERIAL/COLOR	TPU/BLACK	
 M16 connector		 M16 connector		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	18.0 A
				RATED VOLTAGE [V]	600 V
				TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	08/19/08	DESCRIPTION BH-BKM/BSM/2BKM 22	
SEE SPECIFICATIONS		APVD		SCALE	1=2.0		
		UNIT OF MEASUREMENT			IDENTIFICATION NO. U2-14514		REV D
		MILLIMETERS					
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			FILE: U2-14514	SHEET 1 OF 1	
SEE SPECIFICATIONS							

D	UPDATE CLICHE PER ECO	KMY	03/08/13	41196
REV	DESCRIPTION	BY	DATE	ECO NO.