






MALE END VIEW (P1)		FEMALE END VIEW (J1-J3)	WIRING DIAGRAM	SPECIFICATIONS	
				MOLDED BODY MATERIAL/COLOR	TPU/BLACK
 M16 connector		 M16 connector		CONTACT CARRIER MATERIAL	TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD(J1,J2,J3)
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	15.0 A
				RATED VOLTAGE [V]	600 VAC/VDC
				TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS IEC IP67

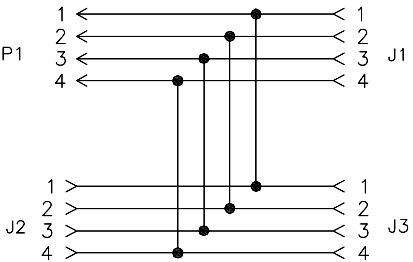

SOURCE DRAWING - FOR REFERENCE ONLY

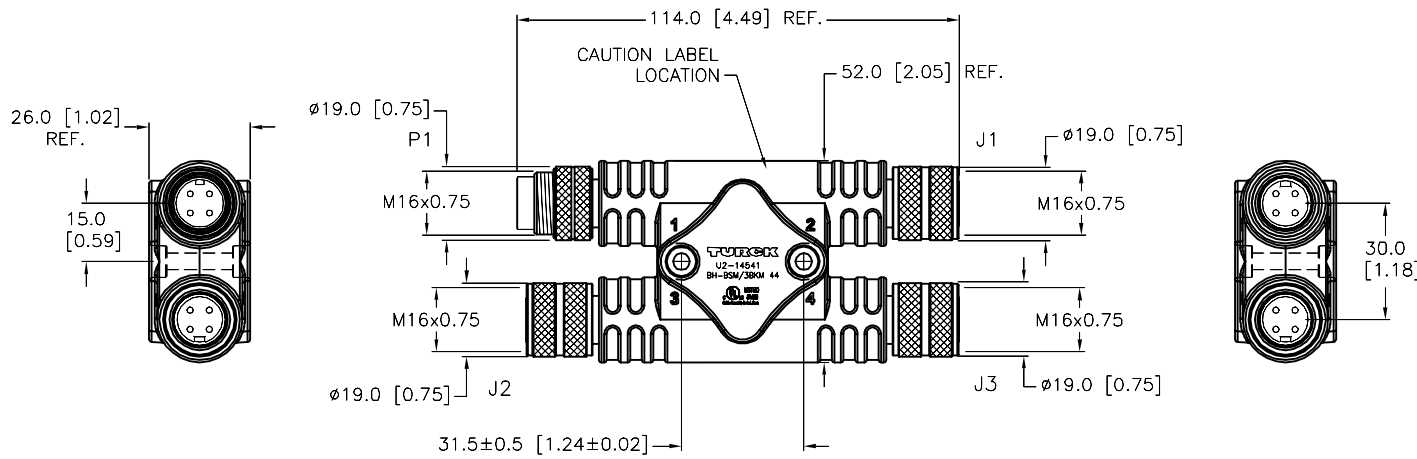

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RDS		DATE 09/03/08	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS						MILLIMETERS		BH-BSM/3BKM 44	
SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
								U2-14541	
								REV	
								E	
E UPDATE CLICHE PER ECO				KMY 03/11/13 41196				FILE: U2-14541	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	