

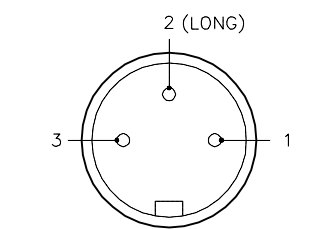



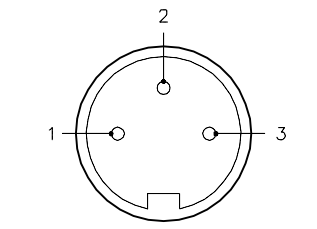


MALE END VIEW (P1)		FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	TPU
 M16 connector		 M16 connector		MOLDED BODY MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	15.0 A
				RATED VOLTAGE [V]	600 VAC/VDC
				TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS IEC IP67

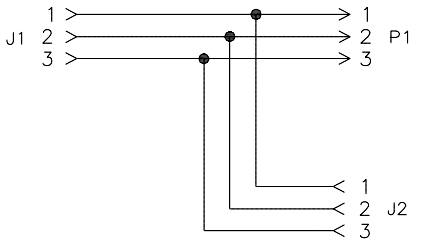

SOURCE DRAWING - FOR REFERENCE ONLY

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

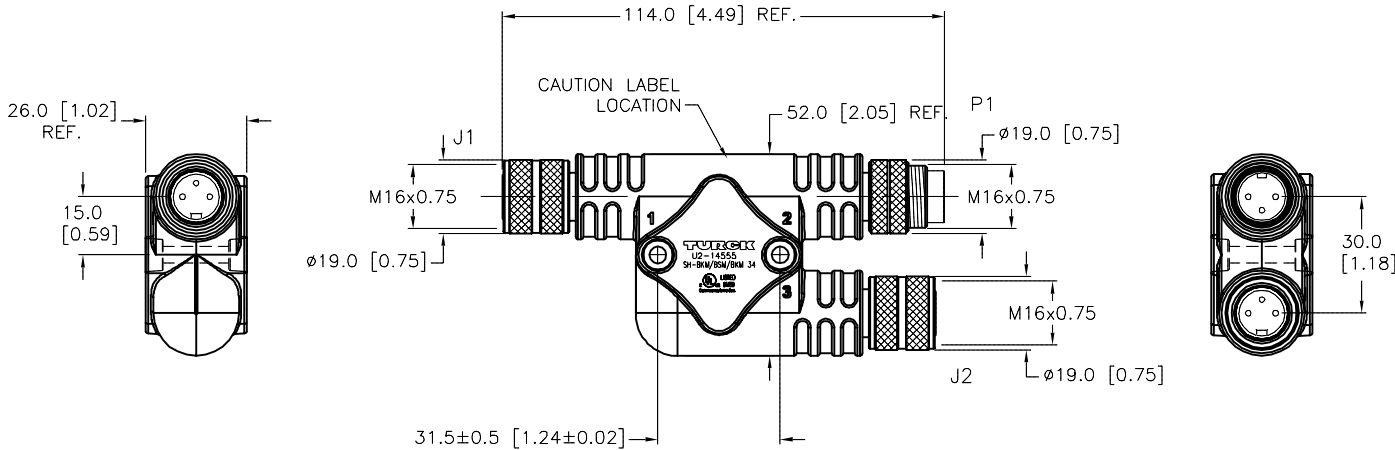RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RDS		DATE 09/03/08	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS						MILLIMETERS		SH-BKM/BSM/BKM 34	
SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
								U2-14555	
								REV	
								E	
E UPDATE CLICHE PER ECO				KMY 04/24/13		41978		FILE: U2-14555	
REV DESCRIPTION				BY DATE		ECO NO.		SHEET 1 OF 1	