




## MALE END VIEW (P1)



## FEMALE END VIEW (J1-J2)





## WIRING DIAGRAM

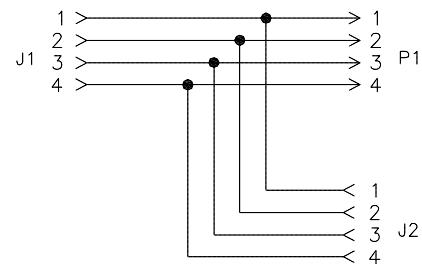

## SPECIFICATIONS

MOLDED BODY MATERIAL/COLOR	TPU/BLACK
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 VAC/VDC
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS IEC IP67

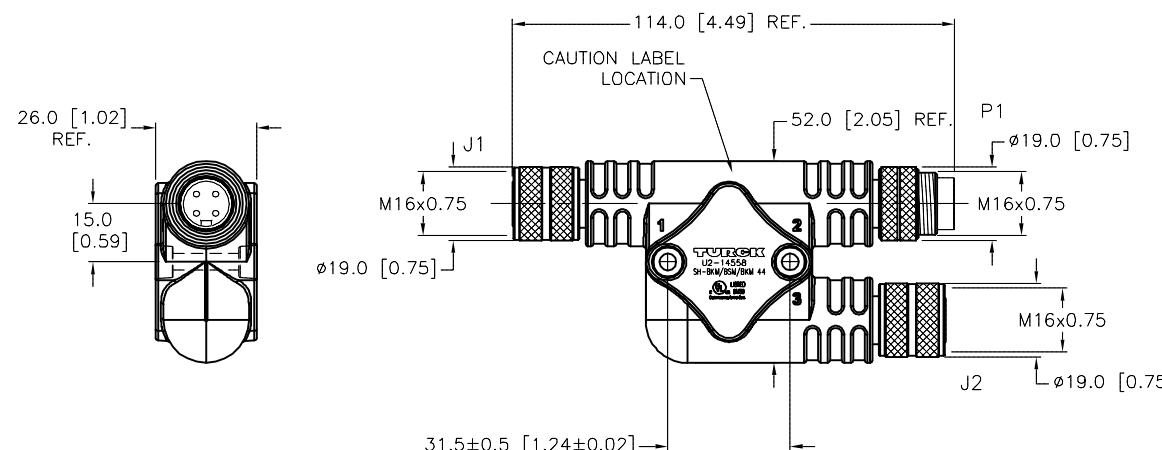

SOURCE DRAWING - FOR REFERENCE ONLY



## CAUTION:

RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
1. 2. 3. 4.			DRFT	RDS	DATE 09/03/08
			APVD	SCALE 1=2.0	DESCRIPTION SH-BKM/BSM/BKM 44
				UNIT OF MEASUREMENT	MILLIMETERS
				IDENTIFICATION NO.	U2-14558
				REV	E
					FILE: U2-14558
					SHEET 1 OF 1

E UPDATE CLICHE PER ECO

KMY 04/24/13 41978

REV DESCRIPTION

BY DATE ECO NO.