


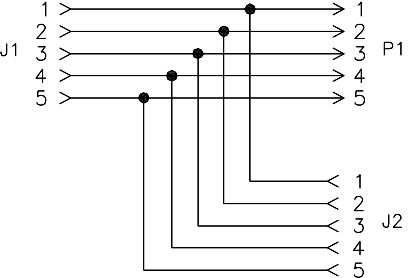
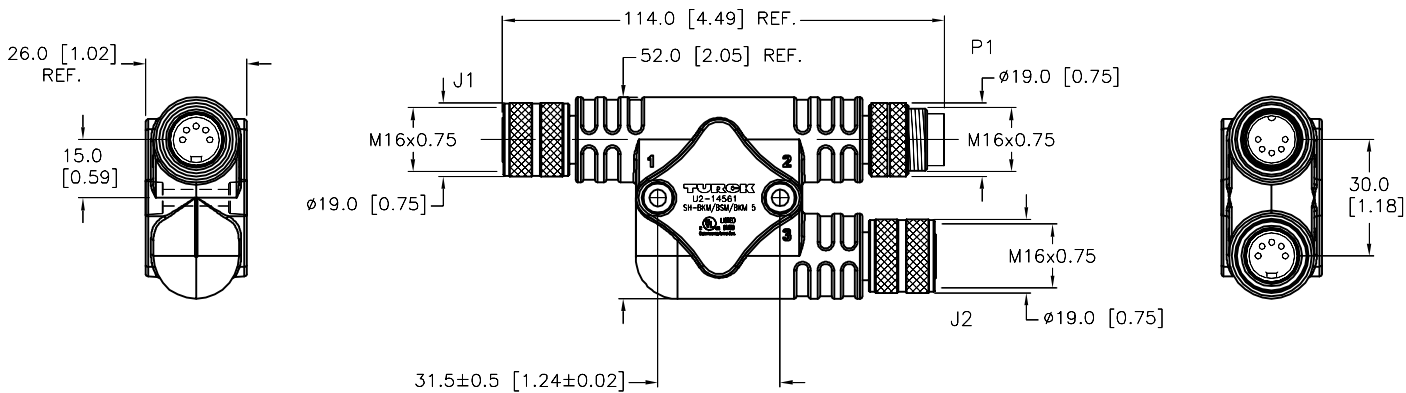


MALE END VIEW (P1)		FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
				MOLDED BODY MATERIAL/COLOR	TPU/YELLOW
 M16 connector		 M16 connector		CONTACT CARRIER MATERIAL	TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	8.0 A
				RATED VOLTAGE [V]	125 VAC/VDC
				TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
				PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com							
					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS		DATE 08/19/08		DESCRIPTION SH-BKM/BSM/BKM 5	
									APVD		SCALE 1=2.0			
									FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETERS DO NOT SCALE THIS DRAWING			
C	UPDATE CLICHE PER ECO	KMY	04/24/13	41978										
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U2-14561 SHEET 1 OF 1									