



SIMILAR TO U2-14749


MALE END VIEW

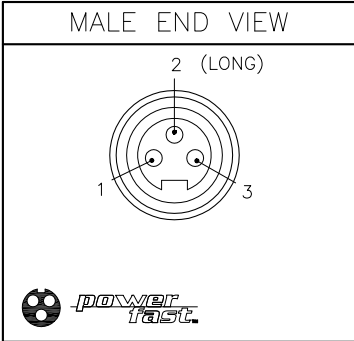

FEMALE END VIEW (J1)

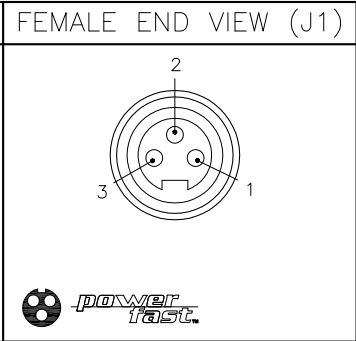


FEMALE END VIEW (J2)

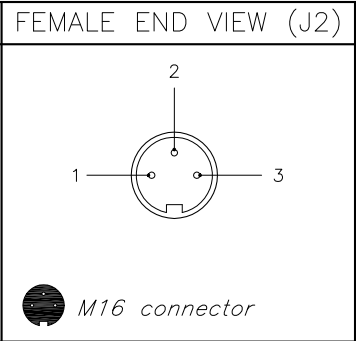


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	30 A COMBINED, 15 A DROP
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS IEC IP67

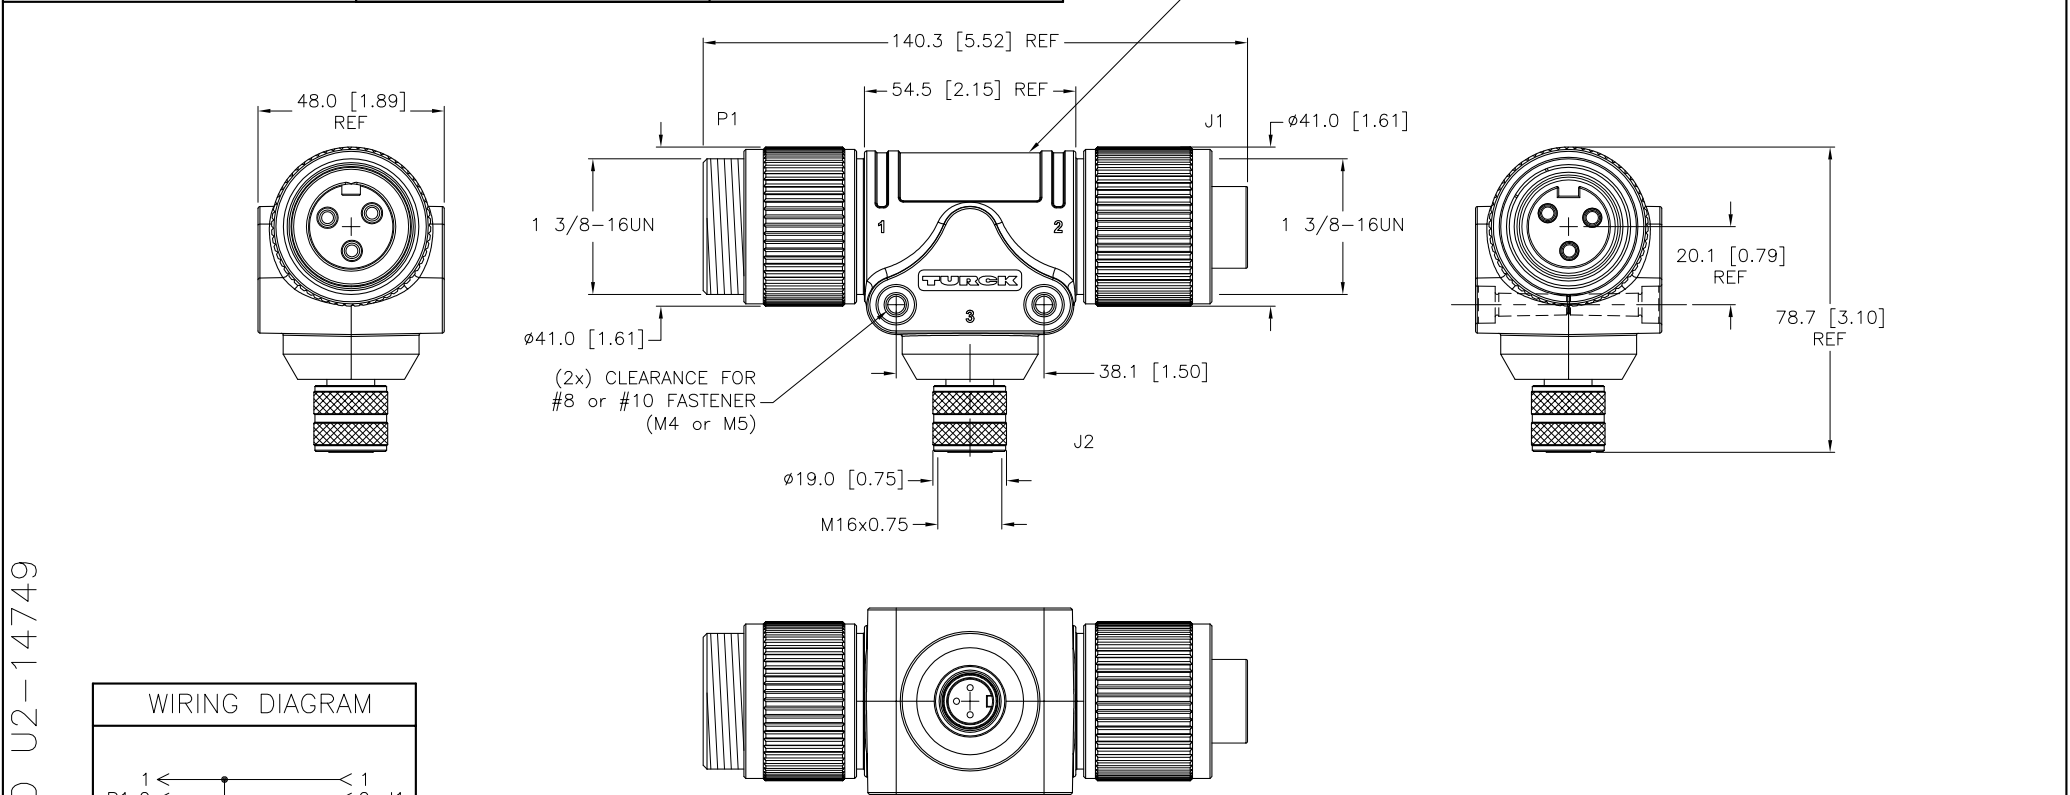

WIRING DIAGRAM

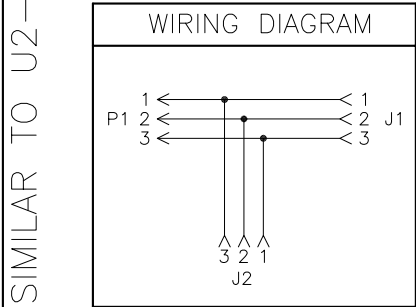

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

3RD ANGLE PROJECTION

THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

A

DRAWING RELEASE

TR

05/25/11

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

TURCK INC

High Technology Sensors and Automation Controls

DATE

10/28/09

DESCRIPTION

GSDM/GKDM/BKM 34

IDENTIFICATION NO.

U2-14751

REV

A

FILE: U2-14751

SHEET 1 OF 1

A	DRAWING RELEASE	TR	05/25/11	
REV	DESCRIPTION	BY	DATE	ECO NO.