




## MALE END VIEW



## FEMALE END VIEW (J1)




## FEMALE END VIEW (J2)





## SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	35 A COMBINED, 18 A DROP
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE

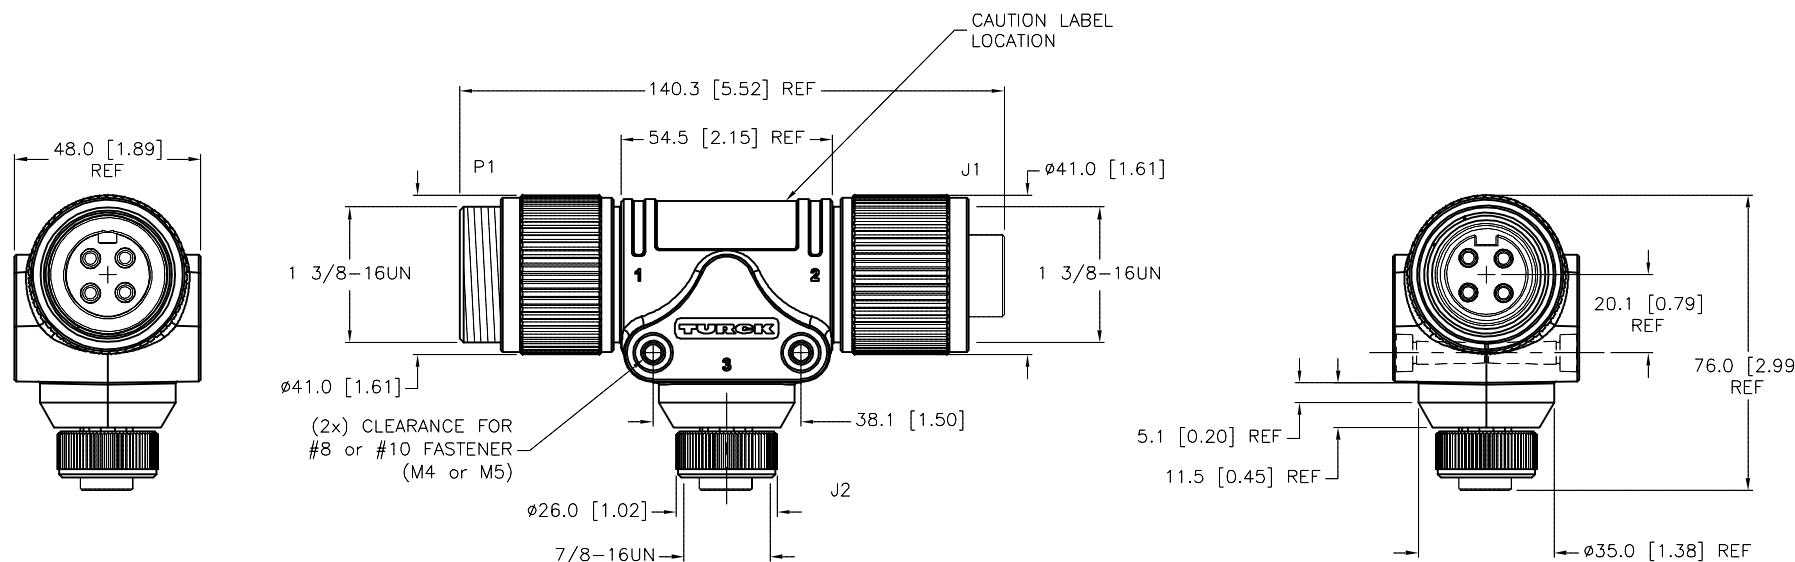

## WIRING DIAGRAM

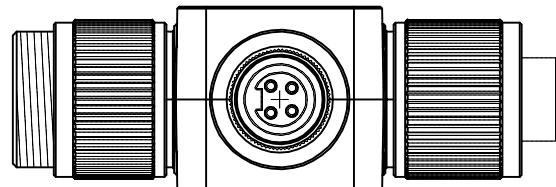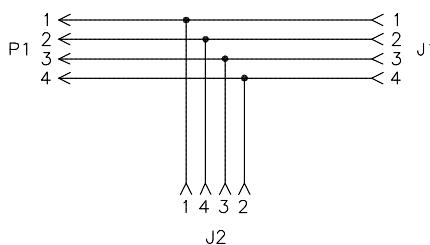


SOURCE DRAWING - FOR REFERENCE ONLY

## RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

## 3RD ANGLE PROJECTION



THIS DRAWING IS  
CONFIDENTIAL AND THE  
PROPERTY OF TURCK  
INC. USE OF THIS  
DOCUMENT WITHOUT  
WRITTEN PERMISSION IS  
PROHIBITED.

## MATERIAL

SEE SPECIFICATIONS

## FINISH

SEE SPECIFICATIONS

DRFT

APVD

UNIT OF MEASUREMENT

CONTACT TURCK  
FOR MORE  
INFORMATION

RWC

SCALE

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

DATE

SCALE

REV

FILE:

10/28/09

1=2.0

U2-14754

DESCRIPTION

IDENTIFICATION NO.

FILE: U2-14754

GSDM/GKDM/RKM 44

SHEET 1 OF 1

SHEET 1 OF 1

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us



**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

F UPDATE RATED CURRENT

NF

04/26/19

69357

REV DESCRIPTION

BY

DATE

ECO NO.