


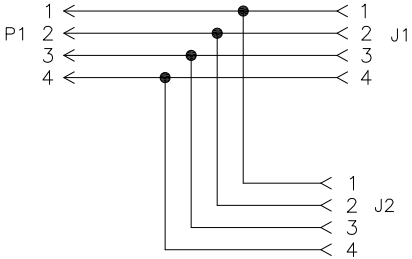



MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS	
			MOLDED BODY MATERIAL/COLOR	NYLON/BLACK
			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

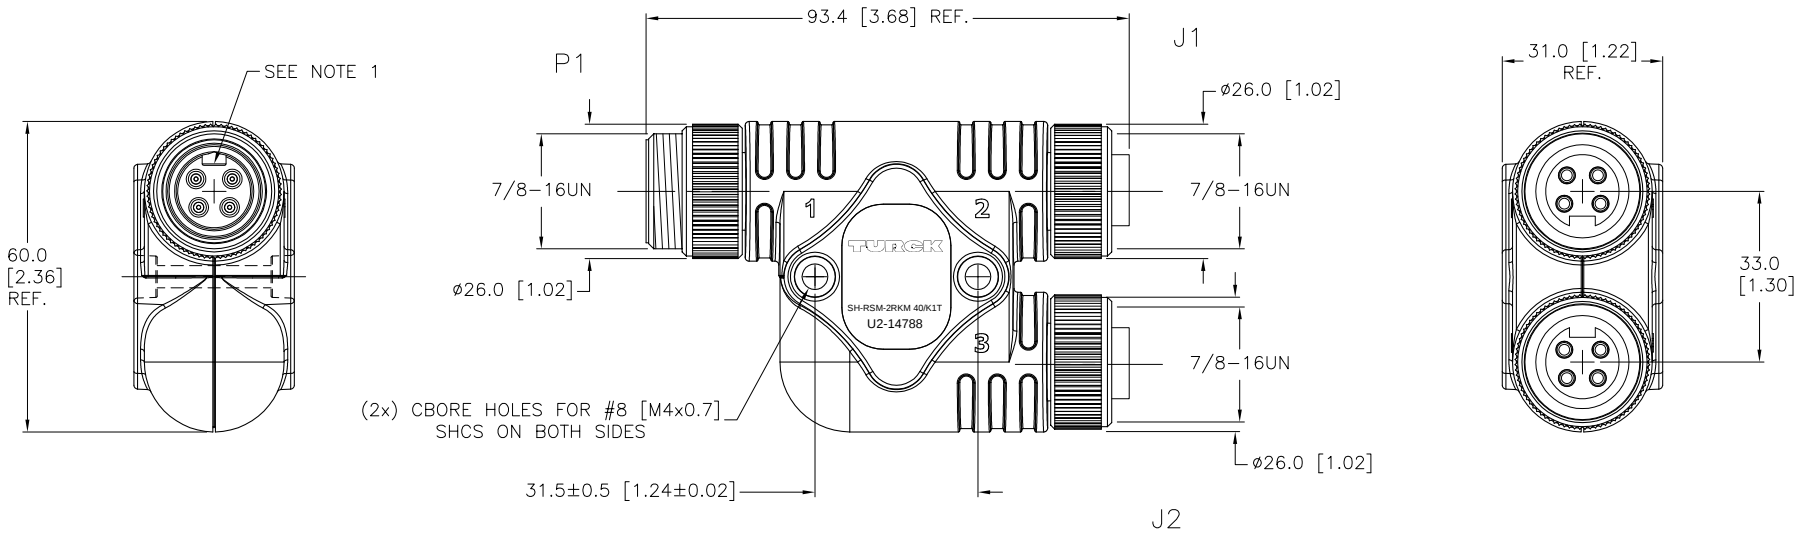

NOTES:

1. "/K1T" DESIGNATES KEYWAY OF CONNECTOR #1 ROTATED TO TOP OF ASSEMBLY. (180° FROM STANDARD).

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/K1T" DESIGNATES KEYWAY OF CONNECTOR #1 ROTATED TO TOP OF ASSEMBLY. (180° FROM STANDARD).					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.  High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 10/16/08		DESCRIPTION SH-RSM-2RKM 40/K1T (1) (2,3)	
					SEE SPECIFICATIONS				DSGN		SCALE 1 = 1.5			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETERS				IDENTIFICATION NO. U2-14788		REV B				
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING				FILE: U2-14788		SHEET 1 OF 1				
B	DRAWING PROCESSED AS PART OF ECO 33971							CBM	04/07/11	33971				
REV	DESCRIPTION			BY	DATE	ECO NO.								