




FEMALE END VIEW

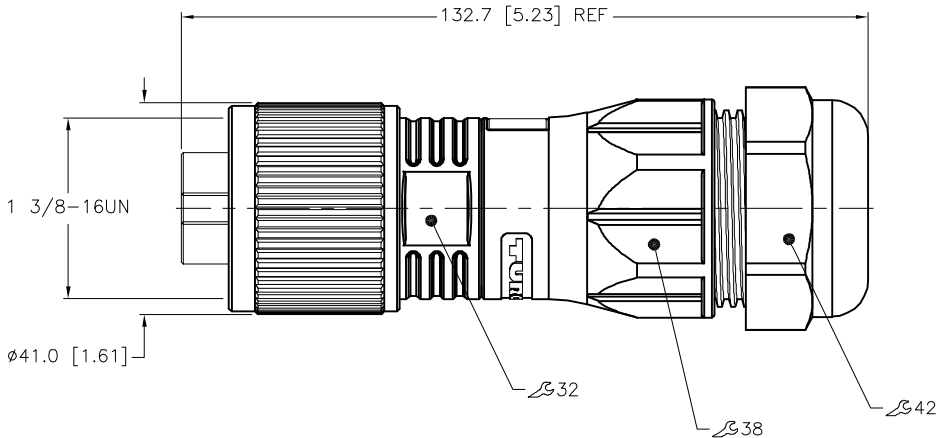


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/NYLON, BLACK
GLAND MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEAL MATERIAL/COLOR	NITRILE/BLACK
RATED CURRENT [A]	UP TO 35.0 A
RATED VOLTAGE [V]	600 V
MAXIMUM WIRE SIZE	8 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	IP 67/NEMA 6P
CABLE GRIP RANGE	9.0mm [0.35"] to 26.0mm [1.02"]



WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

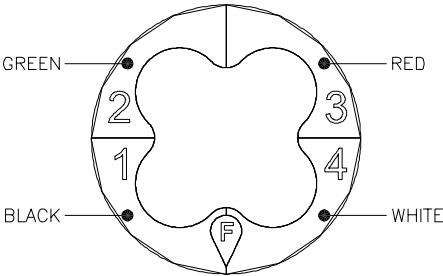

(SCALE 2:1)



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.				DRFT		RWC		DATE 09/10/09		DESCRIPTION GKDM 40-0	
2.				APVD		SCALE 1=1.5					
3.				UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-14827		REV C			
4.											
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY									
SEE SPECIFICATIONS											
FINISH		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING							
SEE SPECIFICATIONS											
								FILE: U2-14827		SHEET 1 OF 1	

C	UPDATE RATED CURRENT	RDS	04/22/20	75819
REV	DESCRIPTION	BY	DATE	ECO. NO.