

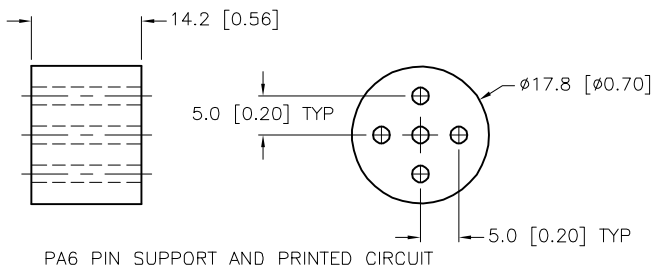
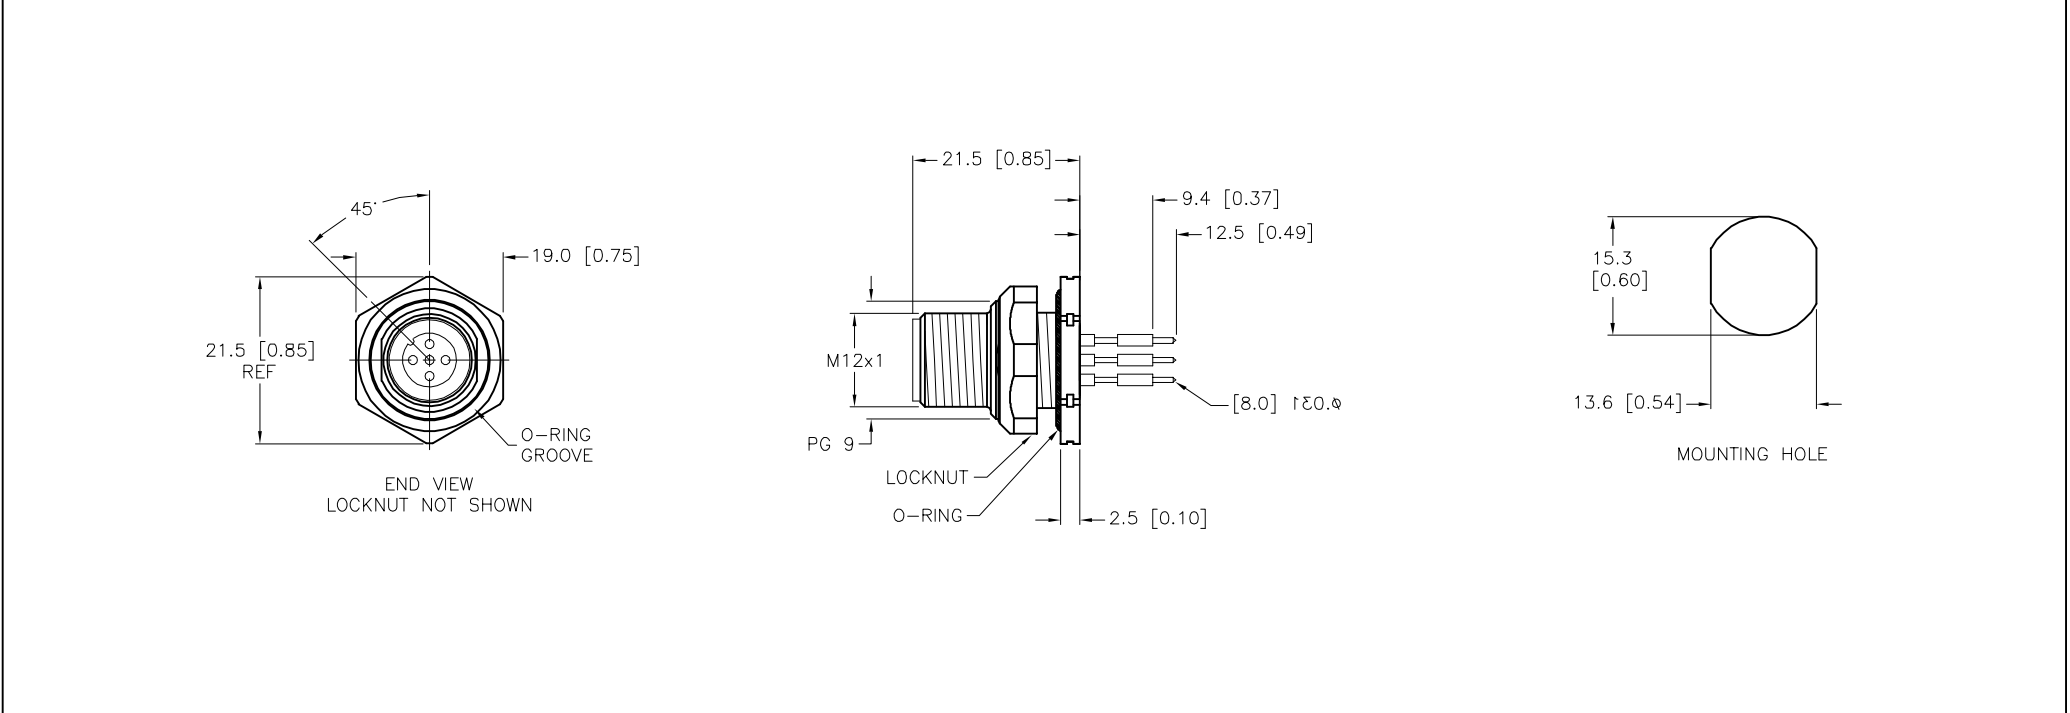



MALE END VIEW		BOARD LAYOUT SCALE 2=1		SPECIFICATIONS	
 1 = SHIELD 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L		 PA6 PIN SUPPORT AND PRINTED CIRCUIT		CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BUE
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
				O-RING MATERIAL	NITRILE
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
				MAX. PANEL THICKNESS	3.0 [0.12]



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "/S3004" DESIGNATES BULK PACKED, NO LABEL, NO BAG

NOTES: 1. "/S3004" DESIGNATES BULK PACKED, NO LABEL, NO BAG					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					MATERIAL SEE SPECIFICATIONS				DRFT RWC APVD		DATE 11/06/08 SCALE 1 = 1.0		DESCRIPTION FSFD 57-PCB/S3004	
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-14886		REV D						
CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-14886		SHEET 1 OF 1								
D	UPDATE ORIENTATION	NF	01/15/16	53091										
REV	DESCRIPTION	BY	DATE	ECO NO.										